


STONE GRIP-TIE

6000-1 Series

SUBMITTAL

Requires 3/4" Socket and Grip-Tie 501 Setting Tool

Type 1 : Wind load restraint for one direction loading to solid back-up.

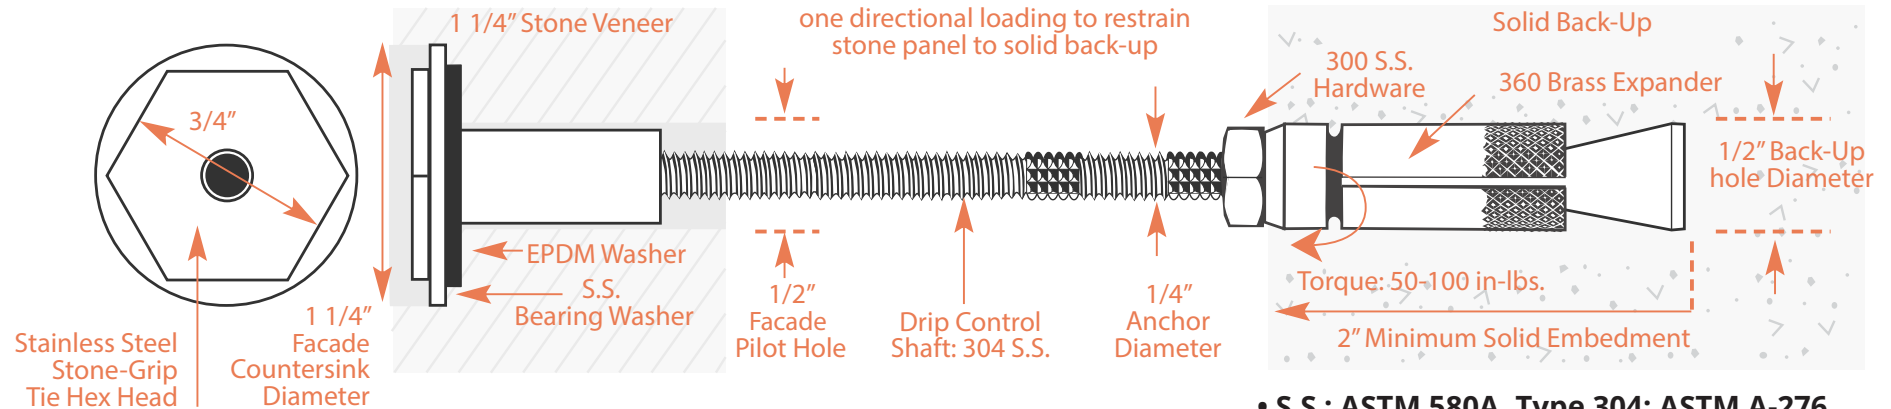

• S.S : ASTM 580A, Type 304; ASTM A-276

LENGTH			HEAD STYLE	
☐ 5 1/2" (88mm)	☐ 7 1/2" (188mm)	☐ 9 1/2" (238mm)	☐ Hex (as shown)	Other _____ Color _____
☐ 6 1/2" (163mm)	☐ 8 1/2" (213mm)	☐ Other _____	☐ Standard	☐ Polished ☐ Powder Coat ☐ Bead Blast
			Other _____	

SPECIFICATIONS

☐ 62300-112N350	6000-1 Series Stone Grip Anchor 3/4" Hex SS Head x 3-1/2" SS Shaft	CTP-6034
☐ 62300-112N400	6000-1 Series Stone Grip Anchor 3/4" Hex SS Head x 4" SS Shaft	CTP-6040
☐ 62300-112N450	6000-1 Series Stone Grip Anchor 3/4" Hex SS Head x 4-1/2" SS Shaft	CTP-6044
☐ 62300-112N550	6000-1 Series Stone Grip Anchor 3/4" Hex SS Head x 5-1/2" SS Shaft	CTP-6054
☐ 62300-112N650	6000-1 Series Stone Grip Anchor 3/4" Hex SS Head x 6-1/2" SS Shaft	CTP-6064

DATE:	APPROVED BY:	DRAWN BY: CMS
SCALE: NTS		REVISED:
PROJECT:		
CUSTOMER:		DRAWING NUMBER: