


STONE GRIP-TIE

6000-2 Series

SUBMITTAL

Requires Hex Key, Grip-Tie 501 Setting Tool,
Compression Sleeve Positioning Tool and
1/2" Deep Well Socket

Type 2 : Wind load restraint for dual direction loading to solid back-up.

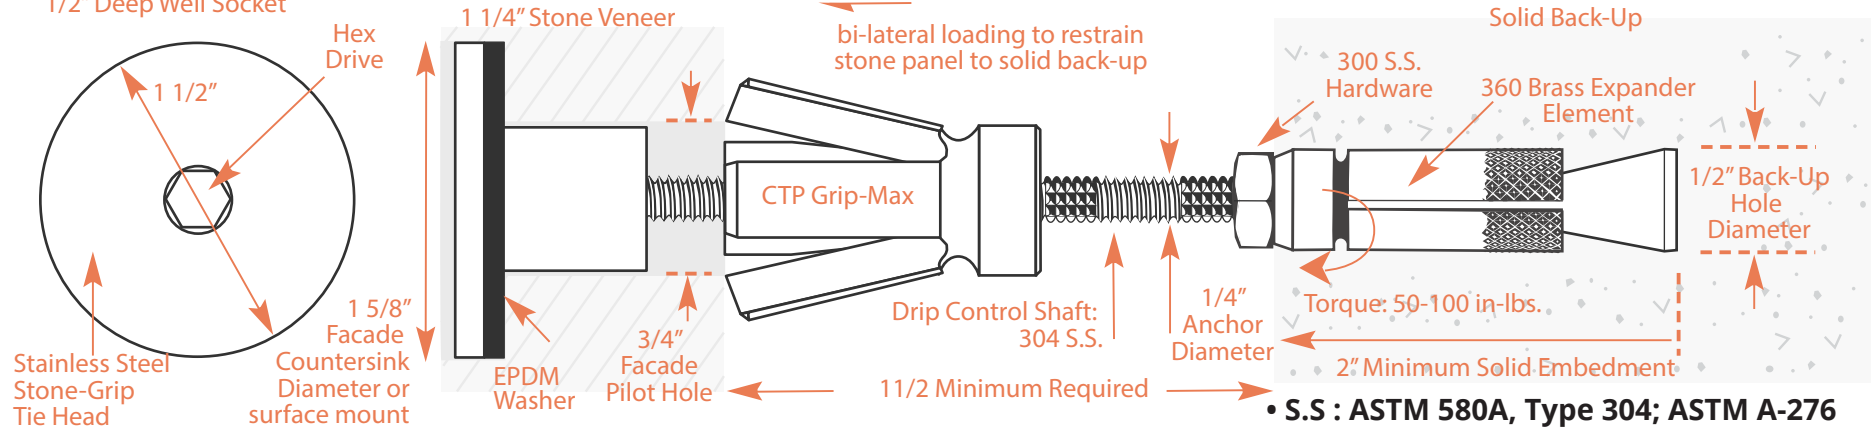

LENGTH

- ☐ 4 1/2" (113mm) ☐ 6 1/2" (163mm)
- ☐ 5 1/2" (138mm) ☐ 7 1/2" (188mm) ☐ Other_____

HEAD STYLE

- ☐ Standard(as shown) Other_____ Color_____
- ☐ Hex ☐ Polished ☐ Powder Coat ☐ Bead Blast
- Other_____

SPECIFICATIONS

☐ 62305-112N450	6000-2 Series Stone Grip Anchor 1-1/2" Dia SS Head x 4-1/2" SS Shaft	CTP-6044-2
☐ 62305-112N550	6000-2 Series Stone Grip Anchor 1-1/2" Dia SS Head x 5-1/2" SS Shaft	CTP-6054-2
☐ 62305-112N650	6000-2 Series Stone Grip Anchor 1-1/2" Dia SS Head x 6-1/2" SS Shaft	CTP-6064-2
☐ 62305-112N750	6000-2 Series Stone Grip Anchor 1-1/2" Dia SS Head x 7-1/2" SS Shaft	CTP-6074-2

DATE:	APPROVED BY:	DRAWN BY: CMS
SCALE: NTS		REVISED:
PROJECT:		
CUSTOMER:		DRAWING NUMBER: