


# SUBMITTAL

Requires 3/4" Socket and Grip-Tie 501 Setting Tool

Type 1: Wind load restraint for one direction loading to hollow and solid back-up.

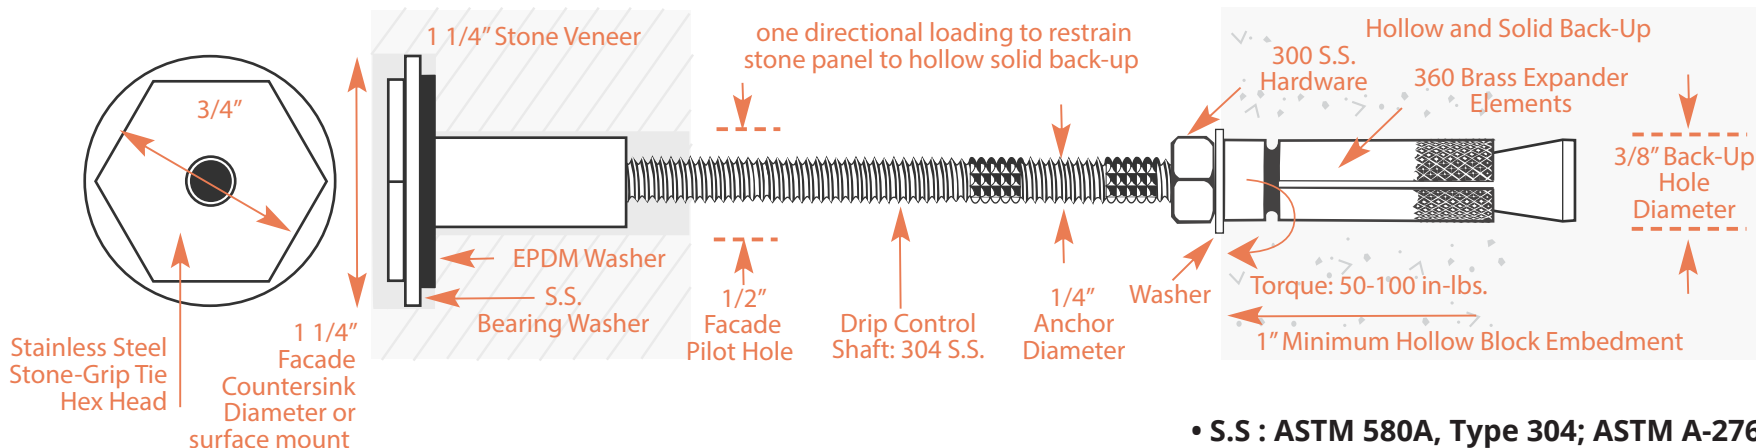

- S.S : ASTM 580A, Type 304; ASTM A-276

LENGTH			HEAD STYLE	
<input type="checkbox"/> 3 1/2" (88mm)	<input type="checkbox"/> 4" (102mm)	<input type="checkbox"/> 4 1/2" (113mm)	<input type="checkbox"/> Hex (as shown)	Other_____ Color_____
<input type="checkbox"/> 5 1/2" (138mm)	<input type="checkbox"/> 6 1/2" (163mm)	<input type="checkbox"/> Other_____	<input type="checkbox"/> Standard	<input type="checkbox"/> Polished <input type="checkbox"/> Powder Coat <input type="checkbox"/> Bead Blast
			Other_____	

## SPECIFICATIONS

<input type="checkbox"/>	62315-150N350	6100-1 Series Stone Grip Anchor 3/4" SS Hex Head x 3-1/2" SS Shaft	CTP-6134-1
<input type="checkbox"/>	62315-150N400	6100-1 Series Stone Grip Anchor 3/4" SS Hex Head x 4" SS Shaft	CTP-6140-1
<input type="checkbox"/>	62315-150N450	6100-1 Series Stone Grip Anchor 3/4" SS Hex Head x 4-1/2" SS Shaft	CTP-6144-1
<input type="checkbox"/>	62315-150N550	6100-1 Series Stone Grip Anchor 3/4" SS Hex Head x 5-1/2" SS Shaft	CTP-6154-1
<input type="checkbox"/>	62315-150N650	6100-1 Series Stone Grip Anchor 3/4" SS Hex Head x 6-1/2" SS Shaft	CTP-6164-1

DATE:	APPROVED BY:	DRAWN BY: CMS
SCALE: NTS		REVISED:
PROJECT:		
CUSTOMER:		DRAWING NUMBER:



PROSOCO

© 2020 PROSOCO INC. 11092020 // **CUSTOMER CARE 800-255-4255** // [PROSOCO.COM](http://PROSOCO.COM)