


6200-1 Series

SUBMITTAL

Requires Hex Key, Grip-Tie 501 Setting Tool,
Toggle Positioning Tool

Type 1 : Wind load restraint for one direction loading to structural steel or tile back-up.

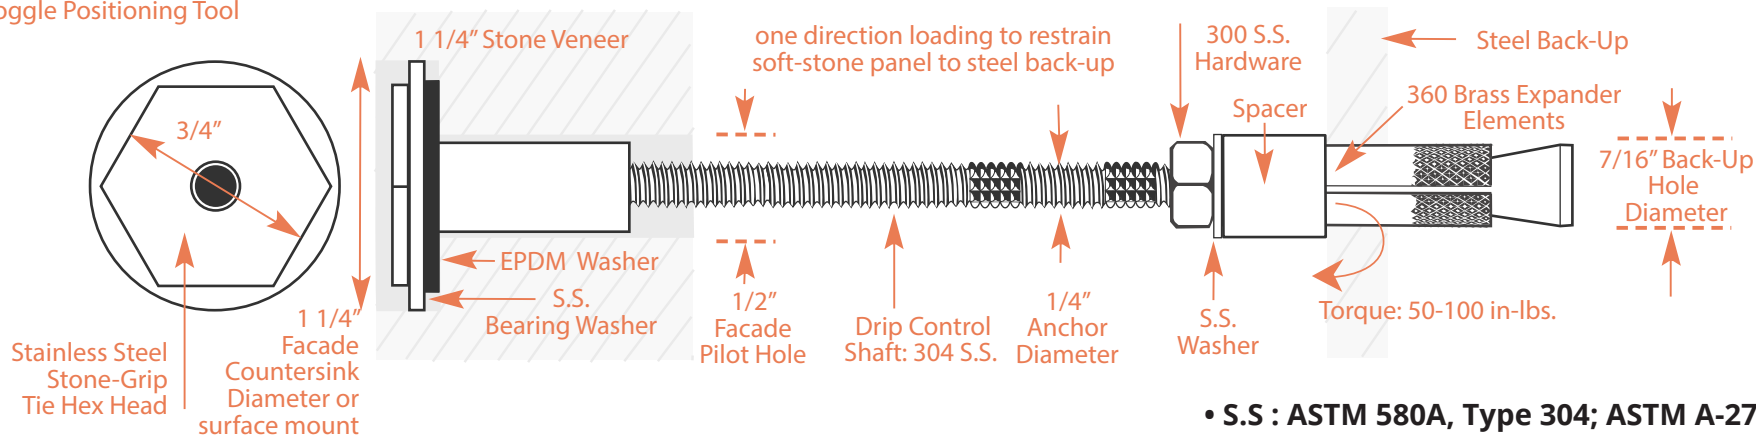

- **S.S : ASTM 580A, Type 304; ASTM A-276**

LENGTH			HEAD STYLE	
☐ 3 1/2" (88mm)	☐ 4" (102mm)	☐ 4 1/2" (113mm)	☐ Hex (as shown)	Other_____ Color_____
☐ 5 1/2" (138mm)	☐ 6 1/2" (163mm)	☐ Other_____	☐ Standard	☐ Polished
			☐ Powder Coat	☐ Bead Blast
			Other_____	

SPECIFICATIONS

☐	62330-112N350	6200-1 Series Panel-Tie 3/4" SS Hex Head x 3-1/2" SS Shaft	CTP-6234-1
☐	62330-112N400	6200-1 Series Panel-Tie 3/4" SS Hex Head x 4" SS Shaft	CTP-6240-1
☐	62330-112N450	6200-1 Series Panel-Tie 3/4" SS Hex Head x 4-1/2" SS Shaft	CTP-6244-1
☐	62330-112N550	6200-1 Series Panel-Tie 3/4" SS Hex Head x 5-1/2" SS Shaft	CTP-6254-1
☐	62330-112N650	6200-1 Series Panel-Tie 3/4" SS Hex Head x 6-1/2" SS Shaft	CTP-6264-1

DATE:	APPROVED BY:	DRAWN BY: CMS
SCALE: NTS		REVISED:
PROJECT:		
CUSTOMER:		DRAWING NUMBER:



PROSOCO

© 2020 PROSOCO INC. 11092020 // **CUSTOMER CARE 800-255-4255** // PROSOCO.COM