


STONE GRIP-TIE

6200-2LD Series

SUBMITTAL

Requires Hex Key,
Grip-Tie 501 Setting Tool,
Toggle Positioning Tool

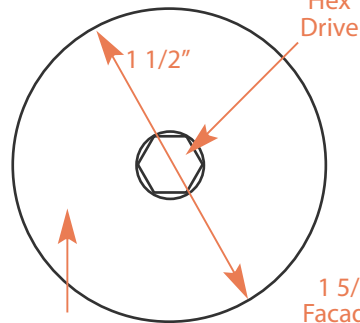

Stainless Steel
CTP Stone-Grip
Tie Head

1 5/8" Facade
Countersink
Diameter or
Surface Mount

Hex
Drive

1 1/4" Stone Veneer

EPDM
Washer

3/4" Facade
Pilot Hole

Type 2 : Wind load Type 2LD: Light Duty restraint for dual direction loading to steel back-up.

bi-lateral loading to restrain
stone panel to steel back-up

S.S. Toggle Wing
Capacity 400#
Ultimate

300 S.S.
Hardware

Spacer

Steel Back-Up

360 Brass Expander
Elements

7/16" Back-Up
Hole
Diameter

Drip Control Shaft:
304 S.S.

1/4" Anchor
Diameter

S.S.
Washer

Torque: 50-100 in-lbs.

11/2 Minimum Required

• S.S : ASTM 580A, Type 304; ASTM A-276

LENGTH

☐ 4 1/2" (113mm) ☐ 5 1/2" (138mm) ☐ 6 1/2" (163mm)

HEAD STYLE

☐ Standard(as shown) Other _____ Color _____

☐ Hex ☐ Polished ☐ Powder Coat ☐ Bead Blast

SPECIFICATIONS

☐ 62340-150N450 6200-2LD Series Stone Grip Anchor 1-1/2" Dia SS Head x 4-1/2" SS Shaft CTP-6244-2LD

☐ 62340-150N550 6200-2LD Series Stone Grip Anchor 1-1/2" Dia SS Head x 5-1/2" SS Shaft CTP-6254-2LD

☐ 62340-150N650 6200-2LD Series Stone Grip Anchor 1-1/2" Dia SS Head x 6-1/2" SS Shaft CTP-6264-2LD

DATE:	APPROVED BY:	DRAWN BY: CMS
SCALE: NTS		REVISED:
PROJECT:		
CUSTOMER:		DRAWING NUMBER: