


STONE GRIP-TIE

6300-1 Series

SUBMITTAL

Requires 3/4" Socket and Grip-Tie 501 Setting Tool

Type 1 : Wind load restraint for uni-directional loading to wood or steel stud back-up.

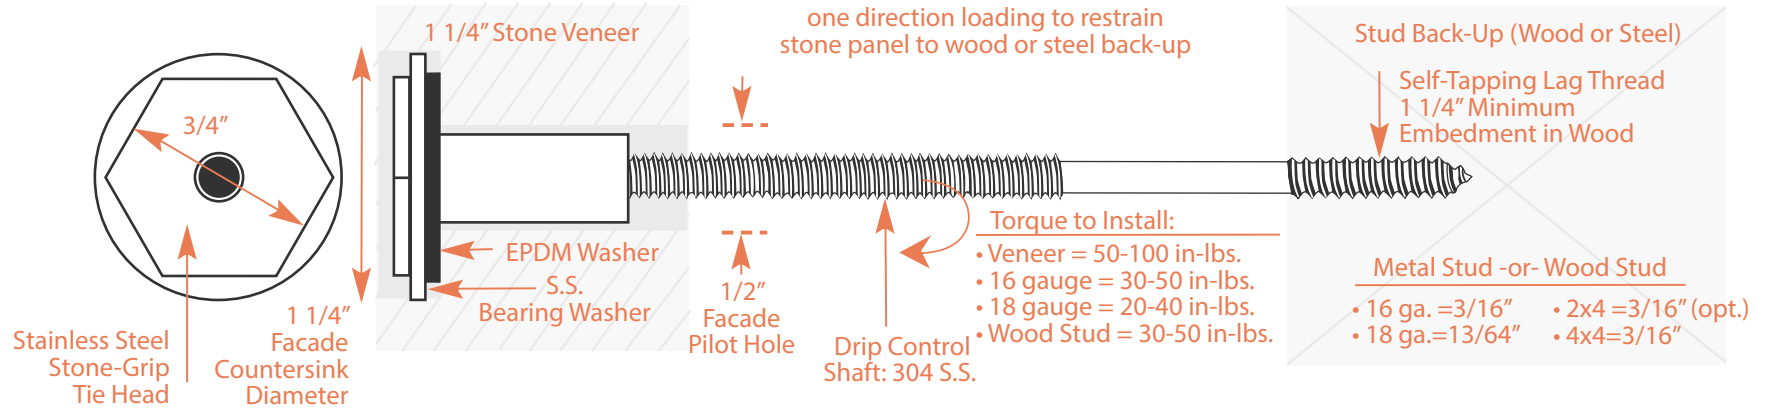

• S.S : ASTM 580A, Type 304; ASTM A-276

LENGTH			HEAD STYLE	
<input type="checkbox"/> 3 1/2" (88mm)	<input type="checkbox"/> 4" (102mm)	<input type="checkbox"/> 4 1/2" (113mm)	<input type="checkbox"/> Hex (as shown)	Other _____ Color _____
<input type="checkbox"/> Other _____			<input type="checkbox"/> Standard	<input type="checkbox"/> Polished <input type="checkbox"/> Powder Coat <input type="checkbox"/> Bead Blast
			Other _____	

SPECIFICATIONS

<input type="checkbox"/> 62345-112N350	6300-1 Series Stone Grip Anchor 3/4" SS Hex Head X 3-1/2" SS shaft	CTP-6334
<input type="checkbox"/> 62345-112N400	6300-1 Series Stone Grip Anchor 3/4" SS Hex Head X 4" SS shaft	CTP-6340
<input type="checkbox"/> 62345-112N450	6300-1 Series Stone Grip Anchor 3/4" SS Hex Head X 4-1/2" SS shaft	CTP-6344

DATE:	APPROVED BY:	DRAWN BY: CMS
SCALE: NTS		REVISED:
PROJECT:		
CUSTOMER:		DRAWING NUMBER: