


STONE GRIP-TIE

6600 (3/8" Dia.) 3 Series

SUBMITTAL

Requires Hex Key and Grip-Tie 501 Setting Tool

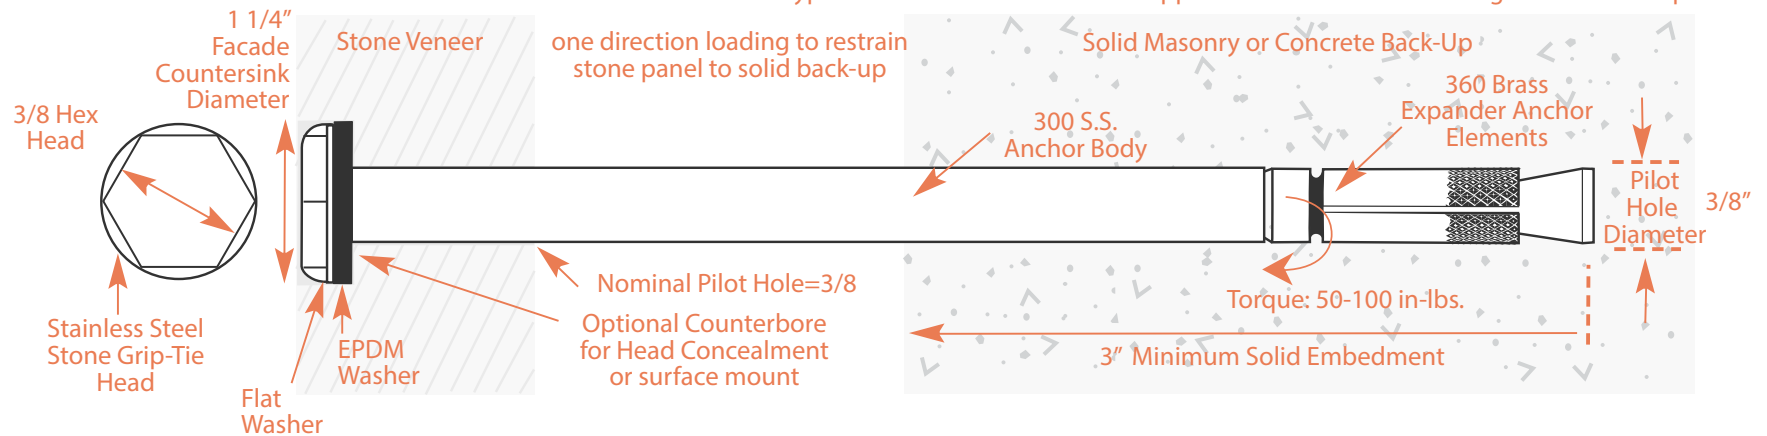

Type 3 : Wind load restraint and support for one direction loading to solid back-up.

one direction loading to restrain stone panel to solid back-up

Solid Masonry or Concrete Back-Up

300 S.S.
Anchor Body

360 Brass
Expander Anchor
Elements

Pilot Hole
Diameter 3/8"

Torque: 50-100 in-lbs.

3" Minimum Solid Embedment

HEAD STYLE

- ☐ Color_____
- ☐ Standard
- ☐ Polished
- ☐ Powder Coat
- ☐ Bead Blast
- ☐ Other_____

ASTM

Brass: ASTM B16, Type 360

S.S. : ASTM 580A, Type 304; ASTM A-276

SPECIFICATIONS

☐	62365-37N500	6600-3 Series Stone Grip Anchor 3/4" Hex SS Head w/3/8"x 5" SS shaft	CTP-6650-3
☐	62365-37N600	6600-3 Series Stone Grip Anchor 3/4" Hex SS Head w/3/8"x 6" SS shaft	CTP-6660-3
☐	62365-37N700	6600-3 Series Stone Grip Anchor 3/4" Hex SS Head w/3/8"x 7" SS shaft	CTP-6670-3
☐	62365-37N800	6600-3 Series Stone Grip Anchor 3/4" Hex SS Head w/3/8"x 8" SS shaft	CTP-6680-3

DATE:	APPROVED BY:	DRAWN BY: CMS
SCALE: NTS		REVISED:
PROJECT:		
CUSTOMER:		DRAWING NUMBER: