


6100-1 Series

Requires 3/4" Socket and Grip-Tie 501 Setting Tool

Type 1: Wind load restraint for one direction loading to hollow and solid back-up.

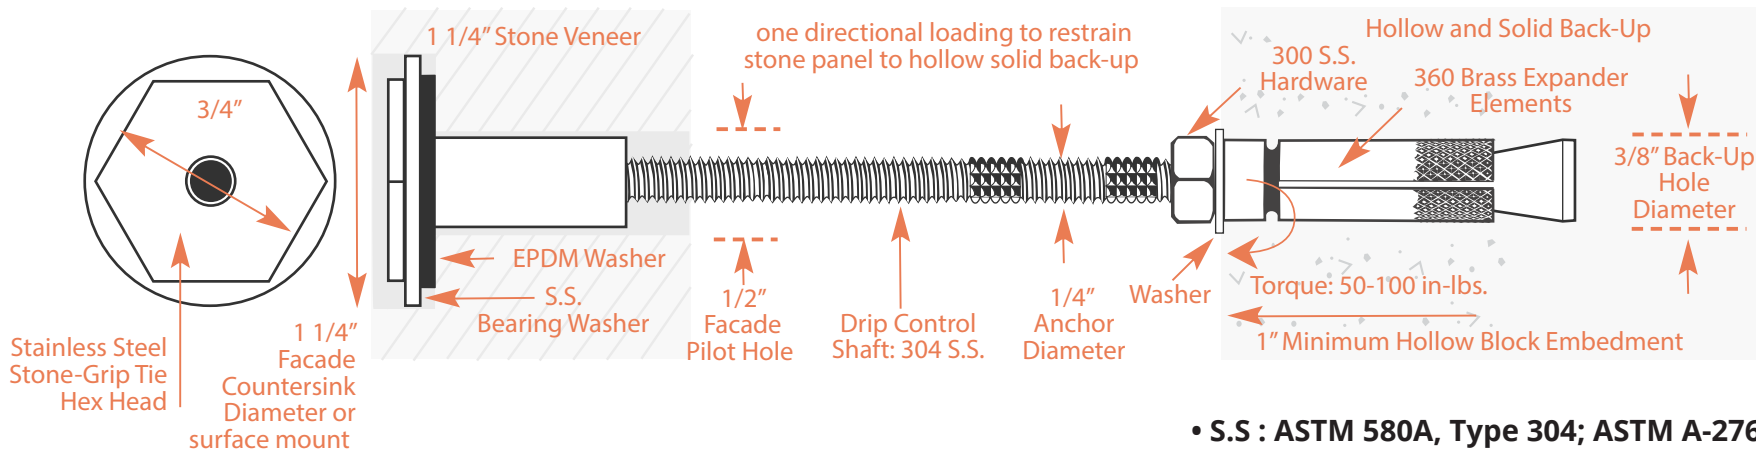

- **S.S : ASTM 580A, Type 304; ASTM A-276**

LENGTH			HEAD STYLE	
☐ 5 1/2" (88mm)	☐ 7 1/2" (188mm)	☐ 9 1/2" (238mm)	☐ Hex (as shown)	Other _____ Color _____
☐ 6 1/2" (163mm)	☐ 8 1/2" (213mm)	☐ Other _____	☐ Standard	☐ Polished ☐ Powder Coat ☐ Bead Blast
			Other _____	

SPECIFICATIONS

☐	62315-150N350	6100-1 Series Stone Grip Anchor 3/4" SS Hex Head x 3-1/2" SS Shaft	CTP-6134-1
☐	62315-150N400	6100-1 Series Stone Grip Anchor 3/4" SS Hex Head x 4" SS Shaft	CTP-6140-1
☐	62315-150N450	6100-1 Series Stone Grip Anchor 3/4" SS Hex Head x 4-1/2" SS Shaft	CTP-6144-1
☐	62315-150N550	6100-1 Series Stone Grip Anchor 3/4" SS Hex Head x 5-1/2" SS Shaft	CTP-6154-1
☐	62315-150N650	6100-1 Series Stone Grip Anchor 3/4" SS Hex Head x 6-1/2" SS Shaft	CTP-6164-1

DATE:	APPROVED BY:	DRAWN BY: CMS
SCALE: NTS		REVISED:
PROJECT:		
CUSTOMER:		DRAWING NUMBER:



PROSOCO