



STONE GRIP-TIE

(formerly called CTP Stone Grip-Tie)

SUBMITTAL

6100-2LD Series

Requires Hex Key,
Grip-Tie 501 Setting Tool,
Toggle Positioning Tool

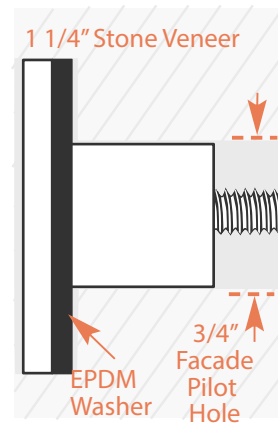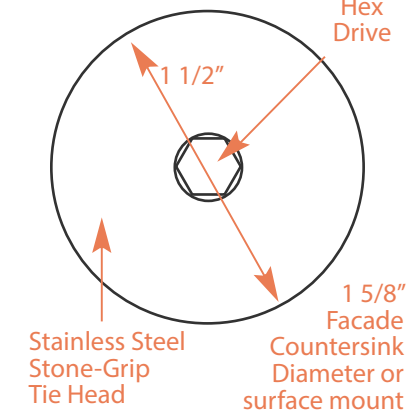

Type 2 : Wind load Type 2LD: Light Duty restraint for dual direction loading to hollow back-up.

bi-lateral loading to restrain stone panel to solid back-up

S.S. Toggle Wing
Capacity 400#
Ultimate

1/4\"
Anchor
Diameter

Drip Control Shaft:
304 S.S.

11/2 Minimum Required

300 S.S.
Hardware

Hollow Back-Up

360 Brass Expander
Element

Torque: 50-100 in-lbs.

1\" Minimum Solid Embedment

3/8\" Back-Up
Hole
Diameter

• S.S : ASTM 580A, Type 304; ASTM A-276

LENGTH

- ☐ 5 1/2" (88mm) ☐ 7 1/2" (188mm) ☐ 9 1/2" (238mm)
- ☐ 6 1/2" (163mm) ☐ 8 1/2" (213mm) ☐ Other _____

HEAD STYLE

- ☐ Hex (as shown) Other _____ Color _____
- ☐ Standard ☐ Polished ☐ Powder Coat ☐ Bead Blast
- Other _____

SPECIFICATIONS

- | | | |
|--|--|--------------|
| ☐ 62325-150N450 | 6100-2LD Series Stone Grip Anchor 1-1/2" Dia SS Head x 4-1/2" SS Shaft | CTP-6144-2LD |
| ☐ 62325-150N550 | 6100-2LD Series Stone Grip Anchor 1-1/2" Dia SS Head x 5-1/2" SS Shaft | CTP-6154-2LD |
| ☐ 62325-150N650 | 6100-2LD Series Stone Grip Anchor 1-1/2" Dia SS Head x 6-1/2" SS Shaft | CTP-6164-2LD |
| ☐ 62325-150N750 | 6100-2LD Series Stone Grip Anchor 1-1/2" Dia SS Head x 7-1/2" SS Shaft | CTP-6174-2LD |

DATE:	APPROVED BY:	DRAWN BY: CMS
SCALE: NTS		REVISED:
PROJECT:		
CUSTOMER:		DRAWING NUMBER: