


6200-2LD Series

Requires Hex Key,
Grip-Tie 501 Setting Tool,
Toggle Positioning Tool

Type 2 : Wind load Type 2LD: Light Duty restraint for dual direction loading to steel back-up.

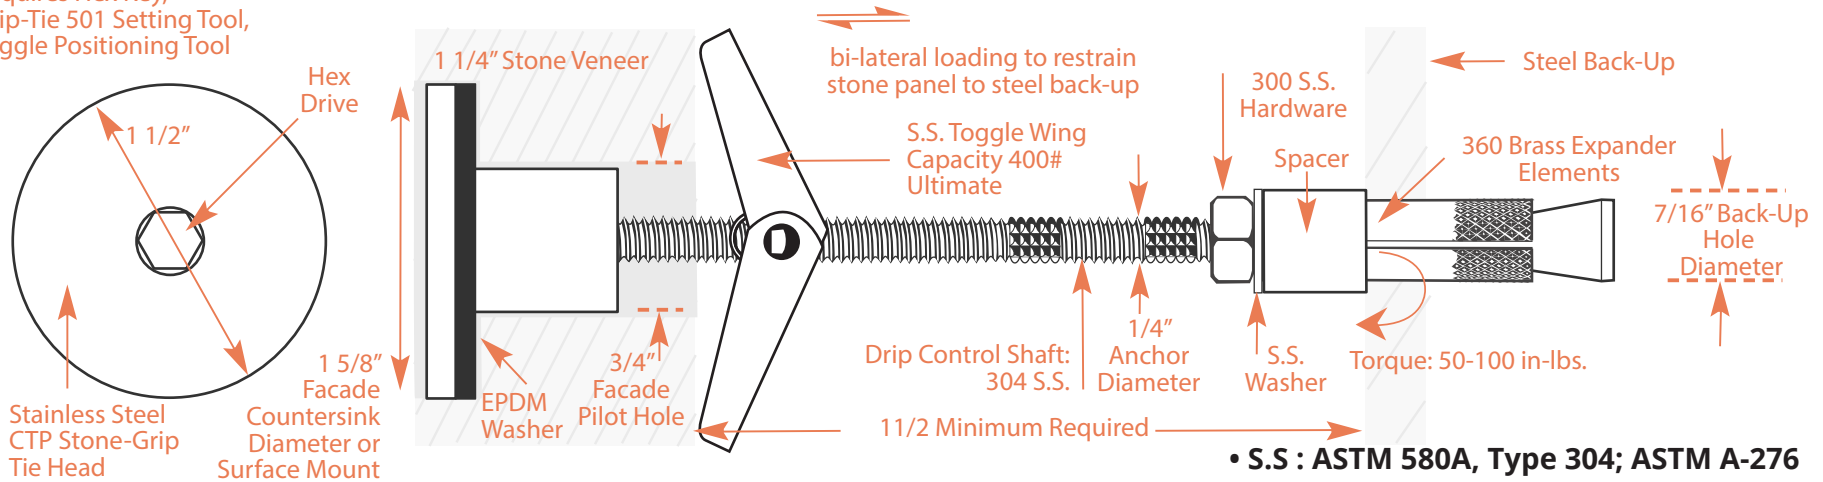

- S.S : ASTM 580A, Type 304; ASTM A-276

LENGTH			HEAD STYLE	
☐ 5 1/2" (88mm)	☐ 7 1/2" (188mm)	☐ 9 1/2" (238mm)	☐ Hex (as shown)	Other_____ Color_____
☐ 6 1/2" (163mm)	☐ 8 1/2" (213mm)	☐ Other_____	☐ Standard	☐ Polished
			☐ Powder Coat	☐ Bead Blast
			Other_____	

SPECIFICATIONS

☐	62340-150N450	6200-2LD Series Stone Grip Anchor 1-1/2" Dia SS Head x 4-1/2" SS Shaft	CTP-6244-2LD
☐	62340-150N550	6200-2LD Series Stone Grip Anchor 1-1/2" Dia SS Head x 5-1/2" SS Shaft	CTP-6254-2LD
☐	62340-150N650	6200-2LD Series Stone Grip Anchor 1-1/2" Dia SS Head x 6-1/2" SS Shaft	CTP-6264-2LD

DATE:	APPROVED BY:	DRAWN BY: CMS
SCALE: NTS		REVISED:
PROJECT:		
CUSTOMER:		DRAWING NUMBER:



PROSOCO

© 2020 PROSOCO INC. 11092020 // **CUSTOMER CARE 800-255-4255** // [PROSOCO.COM](https://prosoco.com)