

STONE GRIP-TIE


(formerly called CTP Stone Grip-Tie)

SUBMITTAL

6300-2LD Series

Requires Hex Key,
Grip-Tie 501 Setting Tool,
Toggle Positioning Tool

Type 2 : Wind load Type 2LD: Light Duty restraint for uni-direction loading to wood or steel back-up.

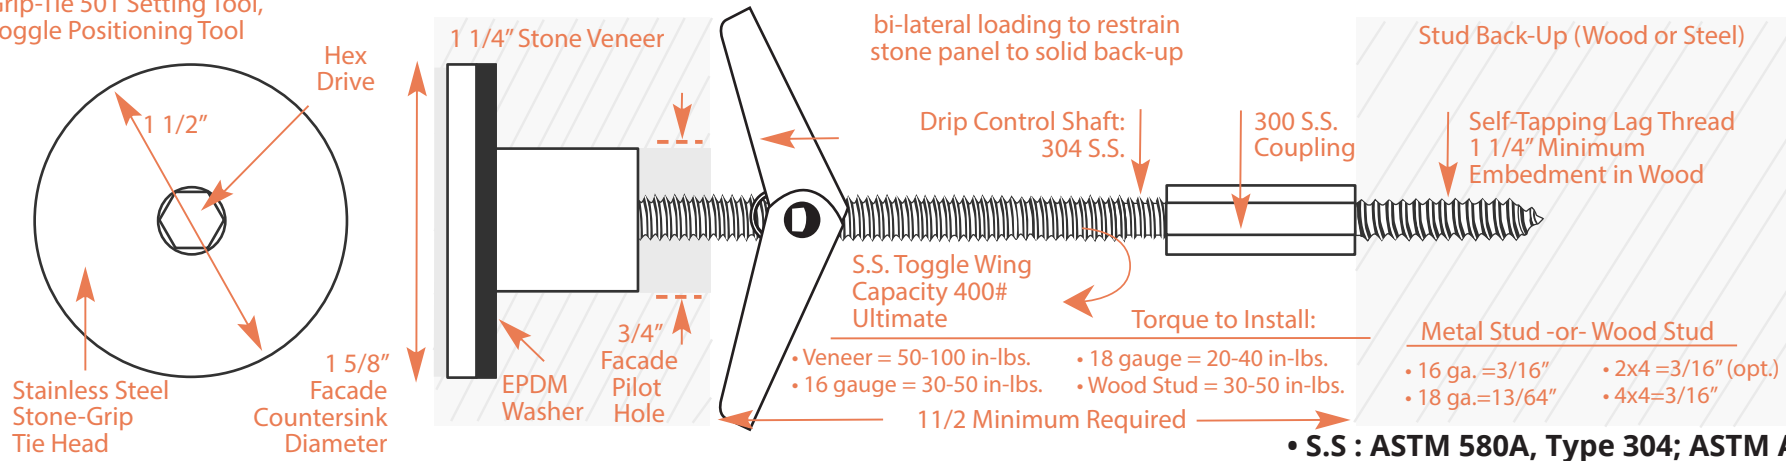

LENGTH

- ☐ 5 1/2" (88mm) ☐ 7 1/2" (188mm) ☐ 9 1/2" (238mm)
- ☐ 6 1/2" (163mm) ☐ 8 1/2" (213mm) ☐ Other _____

HEAD STYLE

- ☐ Hex (as shown) Other _____ Color _____
- ☐ Standard ☐ Polished ☐ Powder Coat ☐ Bead Blast
- Other _____

SPECIFICATIONS

- | | | |
|--|--|--------------|
| ☐ 62355-150N450 | 6300-2LD Series Stone Grip Anchor 1-1/2" Dia SS Head X 4-1/2" SS shaft | CTP-6334-2LD |
| ☐ 62355-150N550 | 6300-2LD Series Stone Grip Anchor 1-1/2" Dia SS Head X 5-1/2" SS shaft | CTP-6354-2LD |
| ☐ 62355-150N650 | 6300-2LD Series Stone Grip Anchor 1-1/2" Dia SS Head X 6-1/2" SS shaft | CTP-6364-2LD |
| ☐ 62355-150N750 | 6300-2LD Series Stone Grip Anchor 1-1/2" Dia SS Head X 7-1/2" SS shaft | CTP-6374-2LD |

DATE:	APPROVED BY:	DRAWN BY: CMS
SCALE: NTS		REVISED:
PROJECT:		
CUSTOMER:		DRAWING NUMBER: