


# CLEANING INSTRUCTIONS

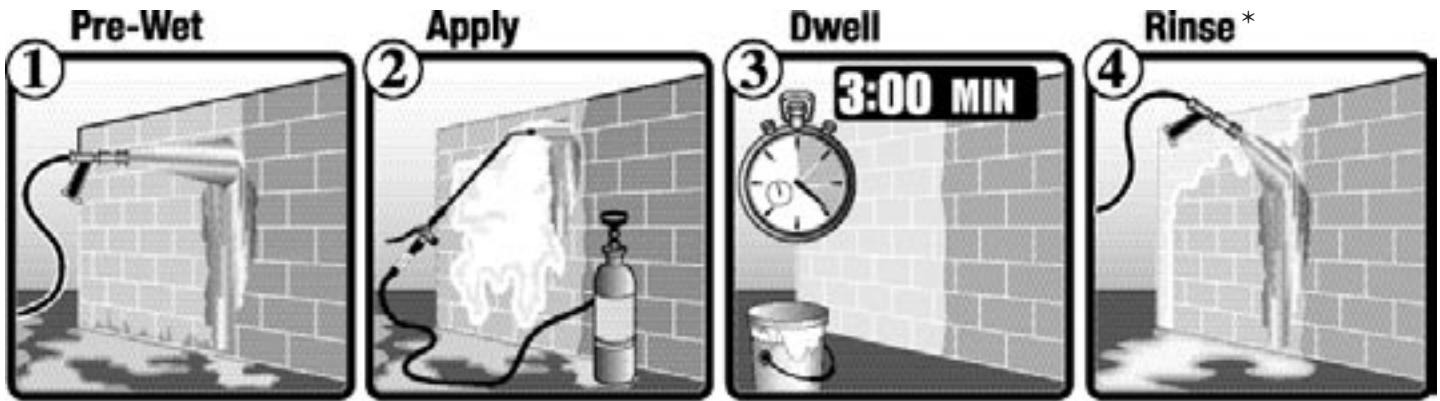

## ATTENTION!

These blocks are made with natural aggregates and are sold as is. They have passed inspection and meet the specifications required. Usage of this product constitutes acceptance. If you have any questions regarding this product, please contact the manufacturer immediately.

Some color variation between blocks is normal and any variation should be distributed evenly through the wall when laying block

## WARNING

Do not clean block with muriatic acid!  
Use a cleaner and weatherproofer made specifically for this block  
and follow the manufacturer's recommendations!

*Clean these blocks with:*

**►SURE-KLEAN►**

**CUSTOM MASONRY CLEANER**

For best overall appearance and color uniformity


*Weatherproof these blocks with:*

**►SURE-KLEAN►**

**CUSTOM MASONRY SEALER**

For best weather resistance

— by **PROSOCO**  
SINCE 1939

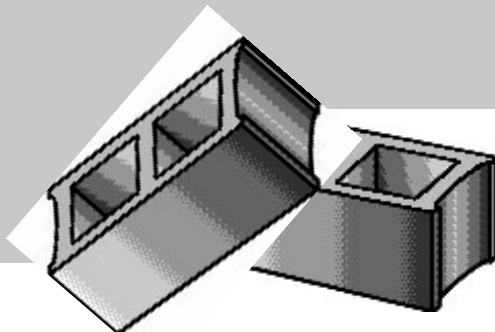


\*Pressure rinse with 800 to 1500 psi at a water flow rate of 4 to 8 gallons per minute and a 15° to 40° fan spray tip.  
Reduce water pressure to avoid damage to delicate masonry.  
Custom Masonry Cleaner should be applied with a pump up sprayer not to exceed 50psi.

 **BEST** BLOCK COMPANY

22001 Groesbeck  
Warren, MI 48089  
(586) 772-7000  
(586) 772-2340 fax

# CLEANING INSTRUCTIONS

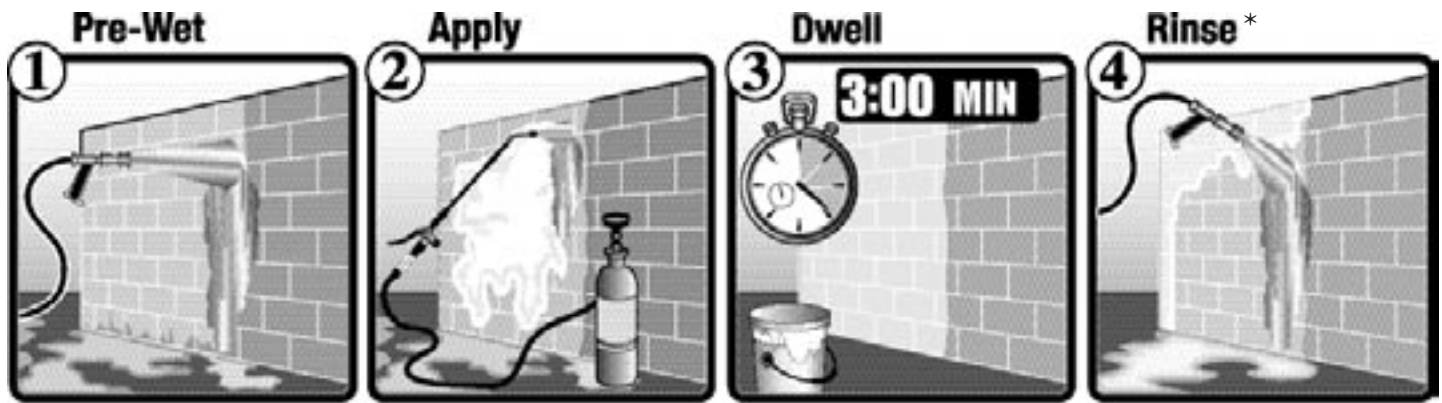

## ATTENTION!

These blocks are made with natural aggregates and are sold as is. They have passed inspection and meet the specifications required. Usage of this product constitutes acceptance. If you have any questions regarding this product, please contact the manufacturer immediately.

Some color variation between blocks is normal and any variation should be distributed evenly through the wall when laying block

## WARNING


Do not clean block with muriatic acid!  
Use a cleaner and weatherproofer made specifically for this block  
and follow the manufacturer's recommendations!

*Clean these blocks with:*

**► SURE-KLEAN ►**

**BURNISHED CUSTOM  
MASONRY CLEANER**

For best overall appearance and color uniformity

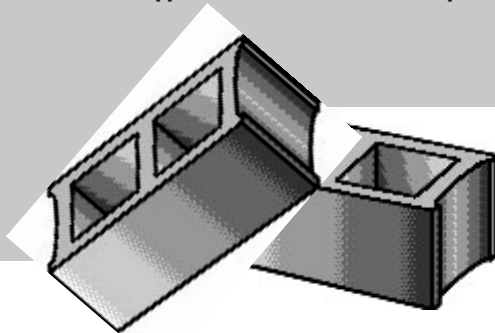

*Weatherproof these blocks with:*

**T-2200 FIELD APPLIED GROUND  
FACE BLOCK ENHANCER**

For best weather resistance

— by **PROSOCO**  
SINCE 1939

\*Pressure rinse with 800 to 1500 psi at a water flow rate of 4 to 8 gallons per minute and a 15° to 40° fan spray tip.  
Reduce water pressure to avoid damage to delicate masonry.  
Custom Masonry Cleaner should be applied with a pump up sprayer not to exceed 50psi.

 **BEST** BLOCK COMPANY

**22001 Groesbeck  
Warren, MI 48089  
(586) 772-7000  
(586) 772-2340 fax**