

JOB NAME _____


CUSTOMER _____

UNIT DESC/WEIGHT _____

COLOR CODE _____ RUN DATE _____

WATER REPELLENT

Water Repellent blocks require mortar additive to produce repellent wall.

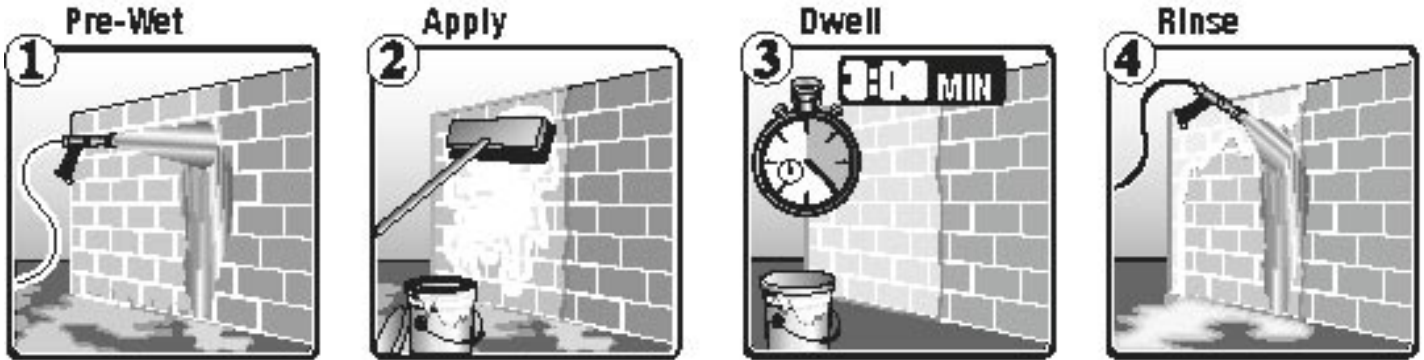

ATTENTION!

These block are made with natural aggregates and are sold as is. They have passed inspection and meet the specifications required. Usage of this product constitutes acceptance. If you have any questions regarding this product, please contact the manufacturer immediately.

Some color variation between blocks is normal and any variation should be distributed evenly through the wall when laying block

WARNING

Do not clean block with muriatic acid!
Use a cleaner and weatherproofer made specifically for this block
and follow the manufacturer's recommendations!

Clean these blocks with:

>SURE-KLEAN>

CUSTOM MASONRY CLEANER

For best overall appearance and color uniformity


Weatherproof these blocks with:

>SURE-KLEAN>

CUSTOM MASONRY SEALER

For best weather resistance

— by **PROSOCO**
SINCE 1939

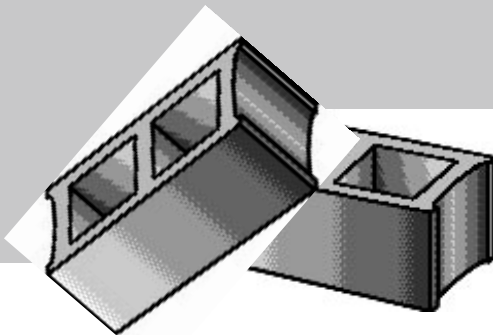

Pressure rinse with 500 to 1500 psi at a water flow rate of 4 to 8 gallons per minute and a 15° to 40° fan spray tip.
Reduce water pressure to avoid damage to delicate masonry.
Custom Masonry Cleaner should be applied with a pump up sprayer not to exceed 50psi.



One Hunt Ct.
Mundelein, IL 60060
847-816-9000
847-816-9062 Fax