



*Pallet Tag Program  
Laboratory Report*

Glen-Gery  
Iberia Plant  
Iberia, OH



*Project No. 2403-04 PTP*

***Prepared For:***



**PROSOCO**

***Prepared By:***

*J. Lucas Comadoll*

J. Lucas Comadoll  
Chemist  
AMT Laboratories

June 2024



# LABORATORY REPORT

---

AMT Laboratories • 3741 Greenway Circle • Lawrence, Kansas 66046 • (888) 376-3600

---

**FOR:** Steve German, Glen-Gery  
**cc:** Steve Long  
Guy Mazza, PROSOCO, Inc.  
Jake Boyer, PROSOCO, Inc.

**SUBJECT:** Glen-Gery  
Iberia Plant  
Iberia, OH  
Pallet Tag Evaluation

**DATE:** June 27, 2024  
**PROJECT:** 2403-04 PTP

**SAMPLES SUBMITTED:** 2 types of clay brick

Sample	Name	Type	Color Per Website	Texture/Finish Per Website	Size
(10) Brick	"Colonial Rose"	Facebrick	White	Bladecut	7-5/8" x 2-1/4"
(10) Brick	"Whiteford Range"	Facebrick	White	Bladecut	7-5/8" x 2-1/4"

**SUBMITTED BY:** Cyrus Lanager  
Production Manager  
Glen-Gery Iberia Plant  
3785 Cardington Iberia Road  
Iberia, OH 43325

**PURPOSE OF TEST:**

- To determine the most appropriate PROSOCO, Inc. new construction cleaner(s) for the submitted sample.
- To determine if specific PROSOCO, Inc. specialty cleaners cause any adverse effects to the submitted sample.

**NOTE: The “Colonial Rose” and “Whiteford Range” facebrick exhibited a variation in color or surface finish upon arrival prior to any testing (as shown in the photograph below).**

**Variation in Color or Surface Finish Present as Submitted**



**“Colonial Rose”  
Facebrick**

**“Whiteford Range”  
Facebrick**

**PRODUCTS EVALUATED:**

<b>New Construction Cleaning</b>	<b>Dilution:</b>
Sure Klean® 600	1:6, 1:8
Sure Klean® Vana Trol®	1:6, 1:8

<b>Adverse Effects</b>	<b>Dilution:</b>
Sure Klean® Ferrous Stain Remover	1:3
Sure Klean® 800 Stain Remover	1:1
Sure Klean® White Scum Remover	1:1
Sure Klean® ReVeal	1:3
Sure Klean® Restoration Cleaner	1:3
Enviro Klean® Klean 'N Release Cleaner	1:10

## TEST METHODS: New Construction Cleaning

Sure Klean® 600 and Sure Klean® Vana Trol® were evaluated to determine the optimal concentration of cleaner which leaves the external surface looking most like the uncleaned surface of the submitted clay brick.

**Surface Finish Removal** is the visual examination of the sample comparing the surface finish of the uncleaned surface to the surface finish cleaned with selected product(s) at given dilutions.

**Substrate Deterioration** is the visual examination of the sample comparing the uncleaned surface to surfaces cleaned with selected product(s) at given dilutions looking for any potential erosion/digestion of the sample.

**Color Change** is the visual examination comparing the color of the uncleaned surface to the color of surfaces cleaned with selected products at given dilutions.

**Staining** is the visual examination for changes that are the result of a chemical reaction that leaves a staining precipitate.

The following is the scale used for reporting results of both categories:

- 0 – **No change** compared to uncleaned surface
- 1 – **Slight change** compared to uncleaned surface
- 2 – **Moderate change** compared to uncleaned surface
- 3 – **Significant change** compared to uncleaned surface

### Cleaning Procedure:

1. Pre-wet the surface and apply diluted cleaning solution according to PROSOCO, Inc. Product Data Sheet.
2. Allow for an appropriate dwell time and periodically agitate:
  - 600 .....5 minutes
  - Vana Trol®.....5 minutes
3. Reapply cleaning solution; do not let cleaner dry into sample.
4. Rinse thoroughly with plenty of fresh water.\*
5. Allow the sample to dry for at least 18 hours and visually examine.
6. Compare the uncleaned surfaces to the cleaned surfaces for the best match.

**\*Rinsing Equipment** – A garden hose with an adjustable nozzle set for a narrow stream of water was used for rinsing because the manufacturer recommends psi values below 400 for the majority of the submitted brick.

**TEST RESULTS AND PHOTOGRAPHS: New Construction Cleaning**

Name: "Colonial Rose" Facebrick					
Product	Dilution	Surface Finish Removal	Substrate Deterioration	Color Change	Staining
600	1:6	0	0	0	0
600	1:8	0	0	0	0
Vana Trol®	1:6	0	0	0	0
Vana Trol®	1:8	0	0	0	0

**"Colonial Rose" Facebrick After Cleaning**






**TEST RESULTS AND PHOTOGRAPHS: New Construction Cleaning (cont.)**

Name: "Whiteford Range" Facebrick					
Product	Dilution	Surface Finish Removal	Substrate Deterioration	Color Change	Staining
600	1:6	0	0	0	0
600	1:8	0	0	0	0
Vana Trol®	1:6	0	0	0	0
Vana Trol®	1:8	0	0	0	0

**"Whiteford Range" Facebrick After Cleaning**

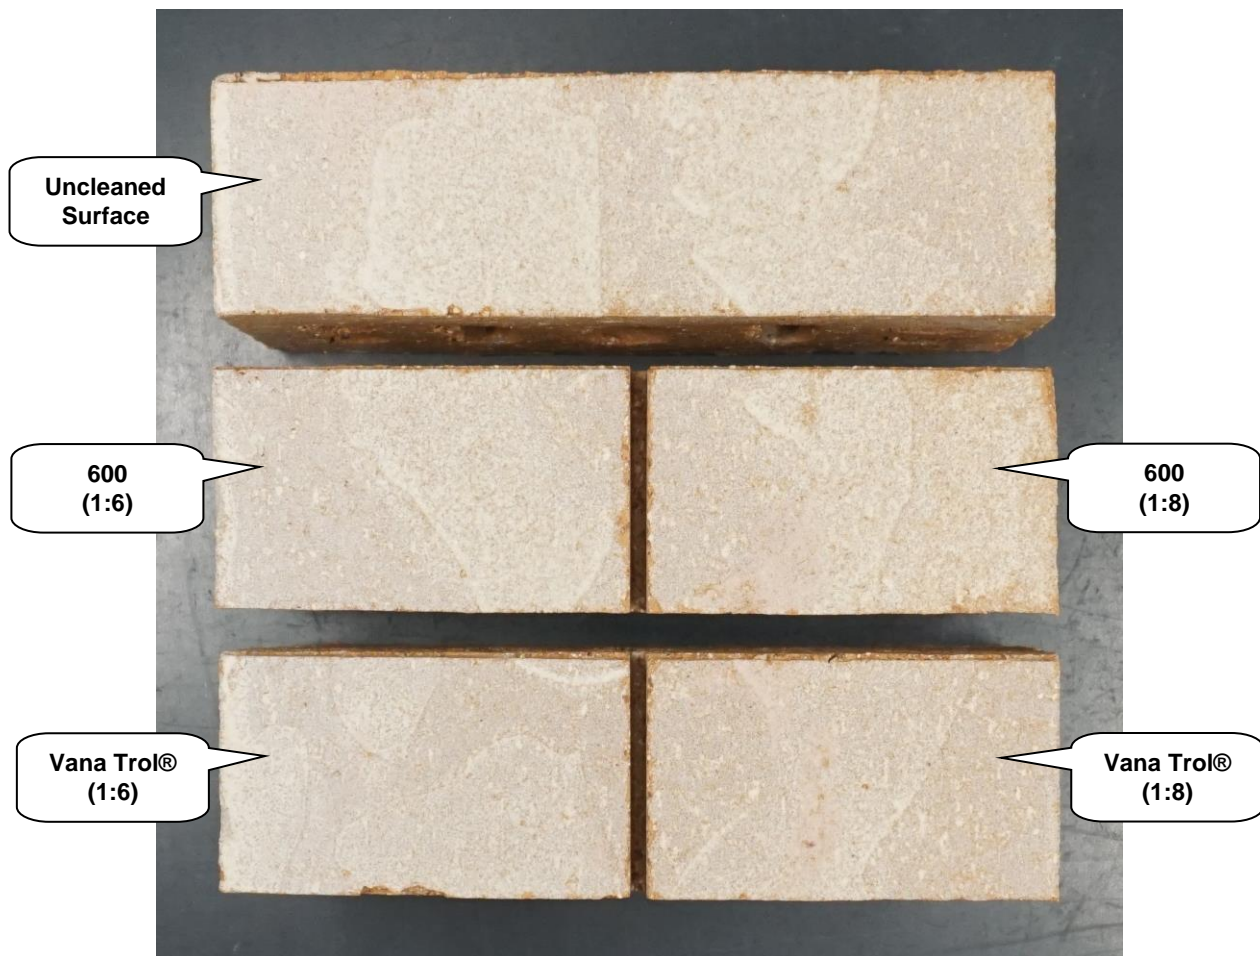

## **CONCLUSIONS: New Construction Cleaning**

In the cleaning tests conducted, neither Sure Klean® 600 nor Sure Klean® Vana Trol® caused any change to the appearance of the submitted brick.

When choosing the most appropriate product for the desired result:

- For a general purpose, concentrated acidic cleaner – test Sure Klean® 600
- For new masonry surfaces that are subject to vanadium, manganese, and other metallic stains – test Sure Klean® Vana Trol®

Worth noting, the Product Data Sheet for Sure Klean® 600 states, “may not be suitable for cleaning buff-colored brick and brick, stone, or tile with manganese or other metallic additives.”

It is recommended that the selected cleaners always be used in the lowest possible concentration. Apply all products in accordance with the manufacturer’s recommendations provided on container labels and product data sheets. On-site testing should be conducted to determine the most appropriate cleaning product and procedures for a particular project. See product literature for additional application and product information.



**RECOMMENDATIONS: New Construction Cleaning**

Recommendations for cleaning the brick submitted by Glen-Gery, Iberia, OH are provided in the chart below. Recommendations are based on the cleaner and dilution that provided the best match to the uncleaned surface as well as brick type.

Sample	New Construction Cleaning
"Colonial Rose" Facebrick	<sup>1</sup> Sure Klean® Vana Trol® (1:6) or (1:8) OR <sup>2</sup> Sure Klean® 600 (1:6) or (1:8)
"Whiteford Range" Facebrick	

NOTE: "1" indicates the recommended first choice and "2" indicates the recommended second choice. These recommendations are based on the Product Data Sheet limitations for certain brick types.

The most appropriate cleaner and dilution should be determined on the specific job-site, and will be dependent primarily on the nature and severity of soiling present at that location.

Apply all products in accordance with the manufacturer's recommendation provided on container labels and product data sheets. On-site testing should be conducted to determine the most appropriate cleaning product and procedures for a particular project. See product literature for additional application and product information.

**TEST METHODS: Adverse Effects**

Various PROSOCO, Inc. cleaners were evaluated to determine if any of the cleaners cause any adverse effects when used on the submitted brick. The samples were visually examined following the procedure below based on the following:

**Surface Finish Removal** is the visual examination of the sample comparing the surface finish of the uncleaned surface to the surface finish cleaned with selected product(s).

**Substrate Deterioration** is the visual examination of the sample comparing the uncleaned surface to surfaces cleaned with selected product(s) for any potential erosion/digestion of the sample.

**Color Change** is the visual examination comparing the color of the uncleaned surface to the color of surfaces cleaned with selected product(s).

**Staining** is the visual examination for changes that are the result of a chemical reaction that leaves a staining precipitate.

The following is the scale used for reporting results of both categories:

- 0 – **No change** compared to uncleaned surface
- 1 – **Slight change** compared to uncleaned surface
- 2 – **Moderate change** compared to uncleaned surface
- 3 – **Significant change** compared to uncleaned surface

**Cleaning Procedure:**

1. Pre-wet the surface and apply diluted cleaning solution according to PROSOCO, Inc. Product Data Sheet.
2. Allow for an appropriate dwell time and periodically agitate:
 


Ferrous Stain Remover .....	5 minutes
800 Stain Remover .....	5 minutes
White Scum Remover .....	3 minutes
ReVeal.....	5 minutes
Restoration Cleaner .....	5 minutes
Klean 'N Release Cleaner.....	10 minutes
3. Reapply cleaning solution; do not let cleaner dry into the brick.
4. Rinse thoroughly with plenty of fresh water.\*
5. Allow the sample to dry for at least 18 hours and visually examine.
6. Compare the uncleaned surfaces to the cleaned surfaces for the best match.

**\*Rinsing Equipment** – A garden hose with an adjustable nozzle set for a narrow stream of water was used for rinsing because the manufacturer recommends psi values below 400 for the majority of the submitted brick.

**TEST RESULTS AND PHOTOGRAPHS: Adverse Effects**

Name: "Colonial Rose" Facebrick					
Product	Dilution	Surface Finish Removal	Substrate Deterioration	Color Change	Staining
Ferrous Stain Remover	1:3	0	0	0	0
800 Stain Remover	1:1	0	0	0	0
White Scum Remover	1:1	0	0	0	0
ReVeal	1:3	0	0	0	0
Restoration Cleaner	1:3	0	0	0	0
Klean 'N Release Cleaner	1:10	0	0	0	0


**"Colonial Rose" Facebrick After Cleaning**

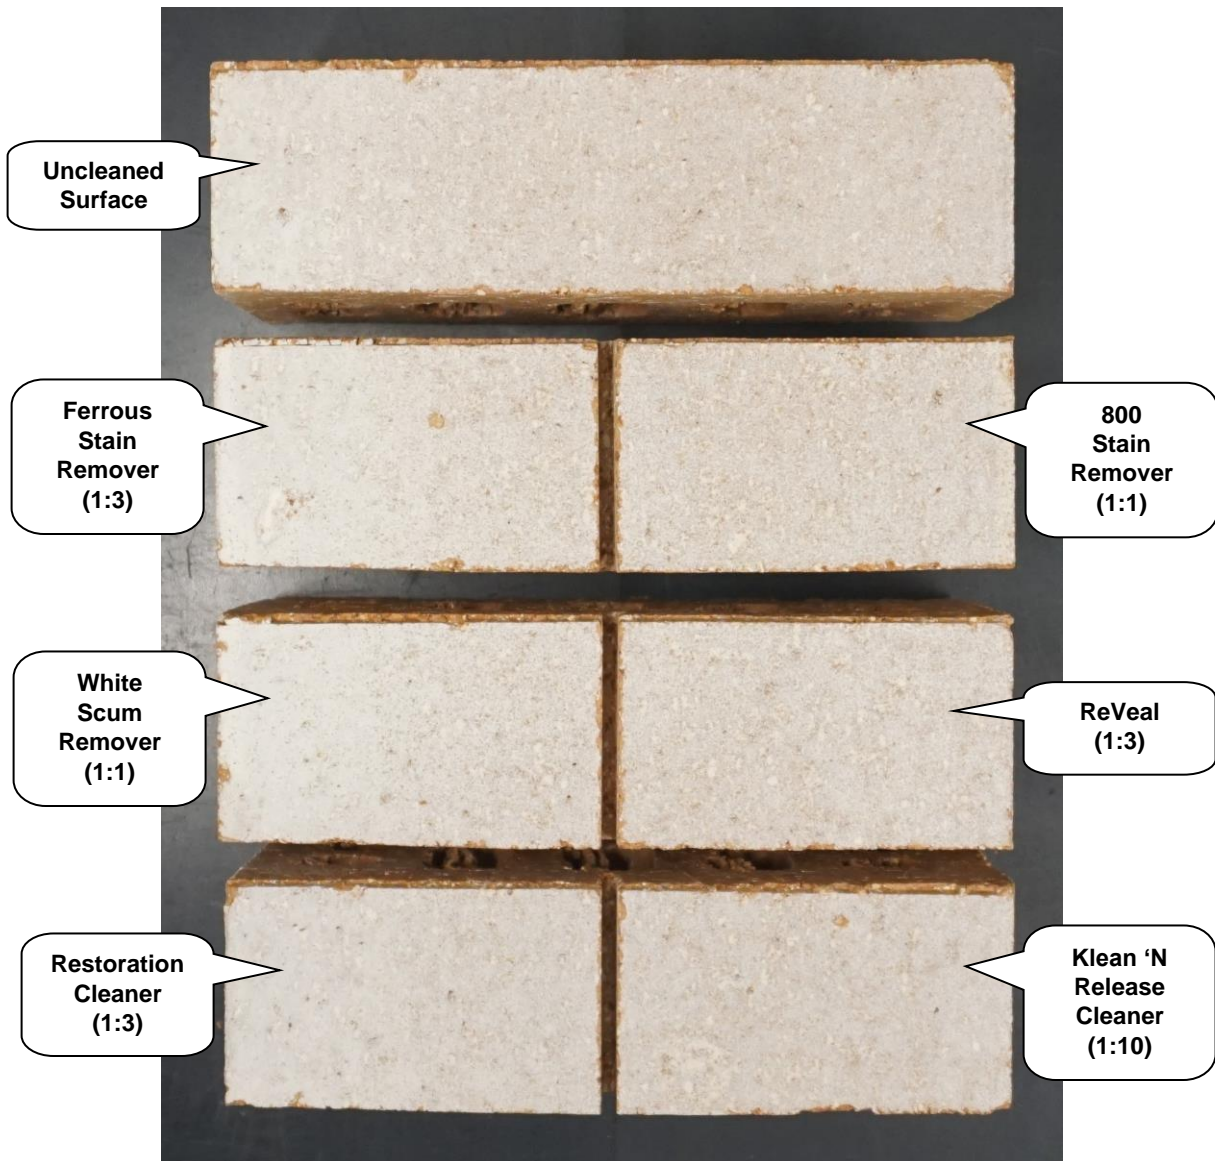

**TEST RESULTS AND PHOTOGRAPHS: Adverse Effects (cont.)**

<b>Name: "Whiteford Range" Facebrick</b>					
<b>Product</b>	<b>Dilution</b>	<b>Surface Finish Removal</b>	<b>Substrate Deterioration</b>	<b>Color Change</b>	<b>Staining</b>
Ferrous Stain Remover	1:3	0	0	0	0
800 Stain Remover	1:1	0	0	0	0
White Scum Remover	1:1	0	0	0	0
ReVeal	1:3	0	0	0	0
Restoration Cleaner	1:3	0	0	0	0
Klean 'N Release Cleaner	1:10	0	0	0	0

**"Whiteford Range" Facebrick After Cleaning**

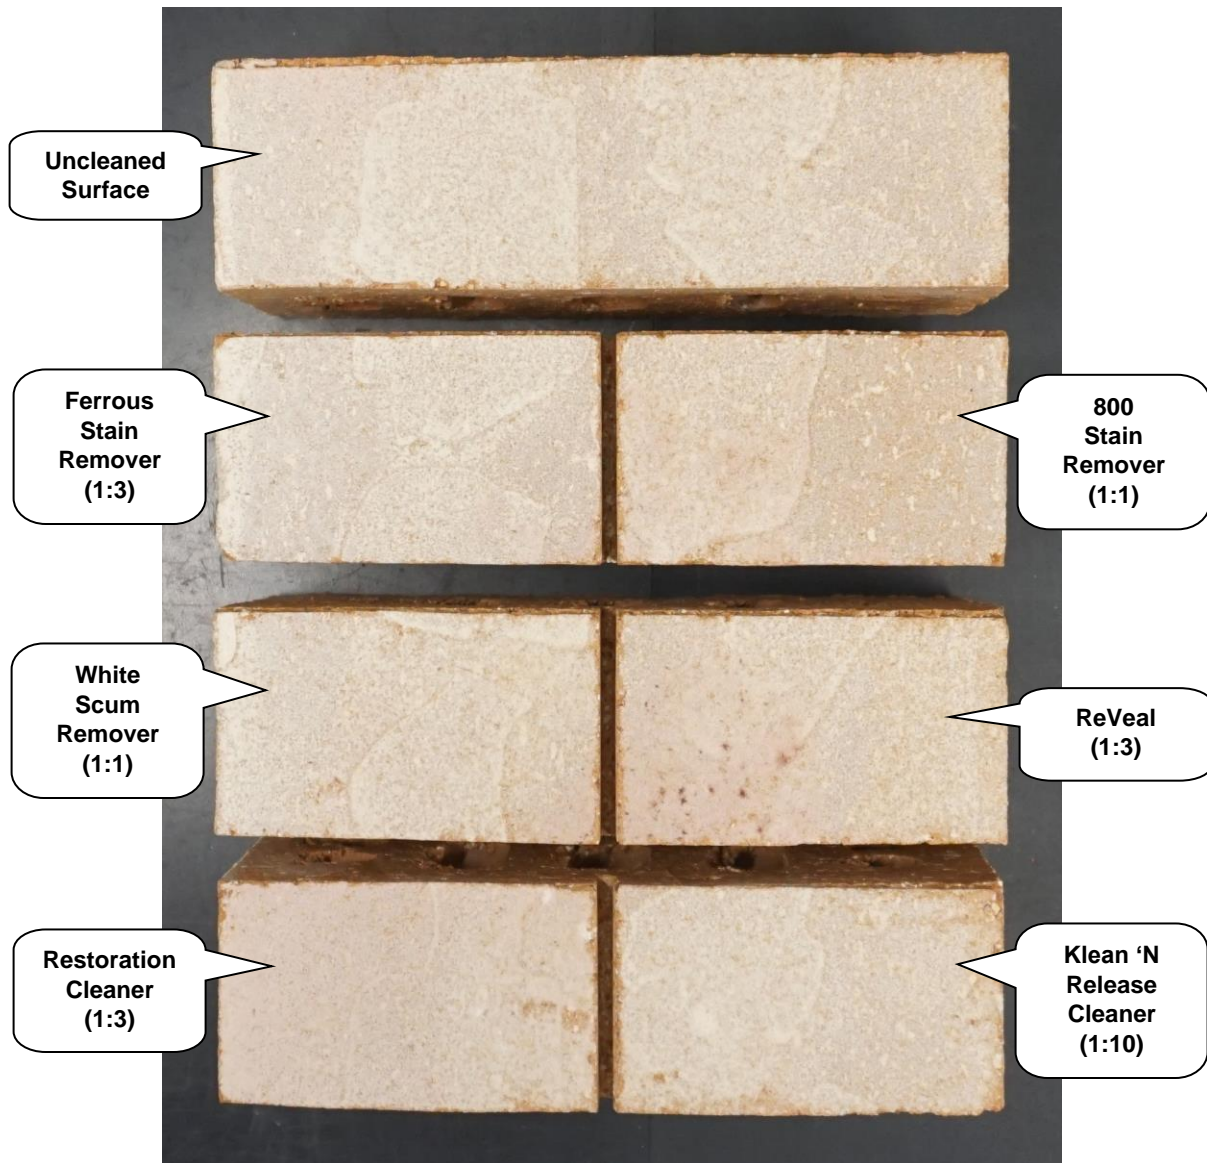

## **CONCLUSIONS: Adverse Effects**

In the adverse effects tests conducted, none of the specialty cleaners caused any change to the appearance of the submitted brick.

When choosing the most appropriate product for the desired result:

- For removal of iron, manganese, vanadium, straw stains, acid burns, and other metallic discolorations from brick, stone, and masonry surfaces – test Sure Klean® Ferrous Stain Remover
- For removal of green vanadium stains, straw stains, acid burns, and other metallic discolorations from most masonry surfaces – test Sure Klean® 800 Stain Remover
- For removal of salt scums (carbonates and sulfates) from clay brick and tile surfaces without discoloring or alter the surface – test Sure Klean® White Scum Remover
- For removal of stubborn atmospheric and carbon staining on masonry and stone – test Sure Klean® ReVeal
- For a concentrated compound able to loosen and dissolve dirt, paint oxidation, carbon buildup, and other atmospheric pollutants – test Sure Klean® Restoration Cleaner
- For delicate substrates and all-purpose cleaning – test Enviro Klean® Klean 'N Release Cleaner

It is recommended that the selected cleaners always be used in the lowest possible concentration. Apply all products in accordance with the manufacturer's recommendations provided on container labels and product data sheets. On-site testing should be conducted to determine the most appropriate cleaning product and procedures for a particular project. See product literature for additional application and product information.

**RECOMMENDATIONS: Adverse Effects**

Recommendations for cleaning the brick submitted by Glen-Gery, Iberia, OH are provided in the chart below.

Sample	Specialty Cleaning
"Colonial Rose" Facebrick	Sure Klean® Ferrous Stain Remover (1:3) OR Sure Klean® 800 Stain Remover (1:1) OR Sure Klean® White Scum Remover (1:1) OR
"Whiteford Range" Facebrick	Sure Klean® ReVeal (1:3) OR Sure Klean® Restoration Cleaner (1:3) OR Enviro Klean® Klean 'N Release Cleaner (1:10)

The most appropriate cleaner and dilution should be determined on the specific job-site, and will be dependent primarily on the nature and severity of soiling present at that location.

Apply all products in accordance with the manufacturer's recommendation provided on container labels and product data sheets. On-site testing should be conducted to determine the most appropriate cleaning product and procedures for a particular project. See product literature for additional application and product information.



J. Lucas Comadoll  
 Chemist

**ALL SAMPLES SUPPLIED FOR THE ABOVE EVALUATION WILL BE DISPOSED OF THIRTY (30) DAYS AFTER THE ISSUE DATE OF THIS REPORT. IF SAMPLES ARE TO BE RETAINED FOR ADDITIONAL TESTING OR RETURNED TO THE SENDER, PROVIDE WRITTEN INSTRUCTIONS TO THE LABORATORY WITHIN THIRTY (30) DAYS OF THE ISSUE DATE OF THIS REPORT.**

Recommendations made within this report are based on laboratory test applications and observations. Final determination of the suitability of a product and/or procedure should be made only after thorough job testing on actual surfaces.