


CTP STONE-GRIP TIE

SUBMITTAL

CTP 6000-2 Series Anchor

Requires CTP Hex Key, CTP 501 Setting Tool, Compression Sleeve Positioning Tool and 1/2" Deep Well Socket

Type 2 : Wind load restraint for dual direction loading to solid back-up.

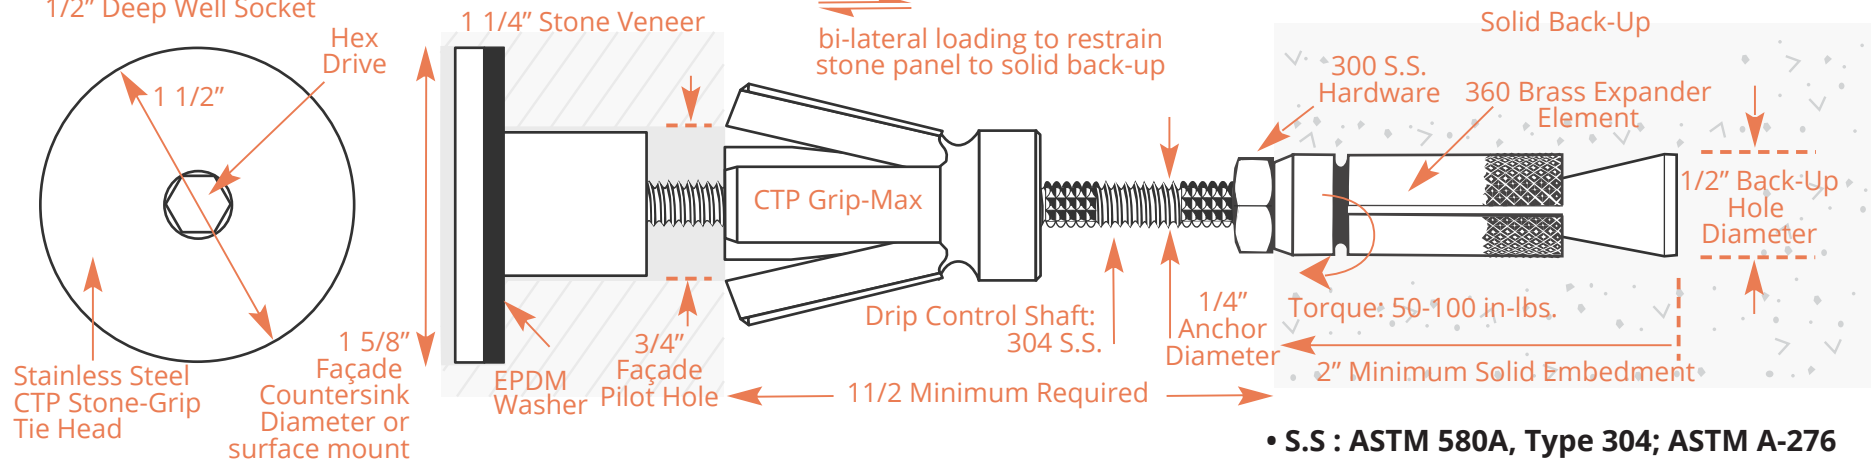

LENGTH			HEAD STYLE		
<input type="checkbox"/> 5 1/2" (138mm)	<input type="checkbox"/> 7 1/2" (188mm)	<input type="checkbox"/> 9 1/2" (238mm)	<input type="checkbox"/> Hex (as shown)	Other _____	Color _____
<input type="checkbox"/> 6 1/2" (163mm)	<input type="checkbox"/> 8 1/2" (213mm)	<input type="checkbox"/> Other _____	<input type="checkbox"/> Standard	<input type="checkbox"/> Polished	<input type="checkbox"/> Powder Coat
			<input type="checkbox"/> Bead Blast	Other _____	

SPECIFICATIONS		
<input type="checkbox"/> 62305-112N450	6000-2 Series Stone Grip Anchor 1-1/2" Dia SS Head x 4-1/2" SS Shaft	CTP-6044-2
<input type="checkbox"/> 62305-112N550	6000-2 Series Stone Grip Anchor 1-1/2" Dia SS Head x 5-1/2" SS Shaft	CTP-6054-2
<input type="checkbox"/> 62305-112N650	6000-2 Series Stone Grip Anchor 1-1/2" Dia SS Head x 6-1/2" SS Shaft	CTP-6064-2
<input type="checkbox"/> 62305-112N750	6000-2 Series Stone Grip Anchor 1-1/2" Dia SS Head x 7-1/2" SS Shaft	CTP-6074-2

DATE:	APPROVED BY:	DRAWN BY:
SCALE: NTS		REVISED:
PROJECT:		
CUSTOMER:		DRAWING NUMBER: