


SUBMITTAL

Requires CTP Hex Key, CTP 501 Setting Tool,
Compression Sleeve Positioning Tool and
1/2" Deep Well Socket

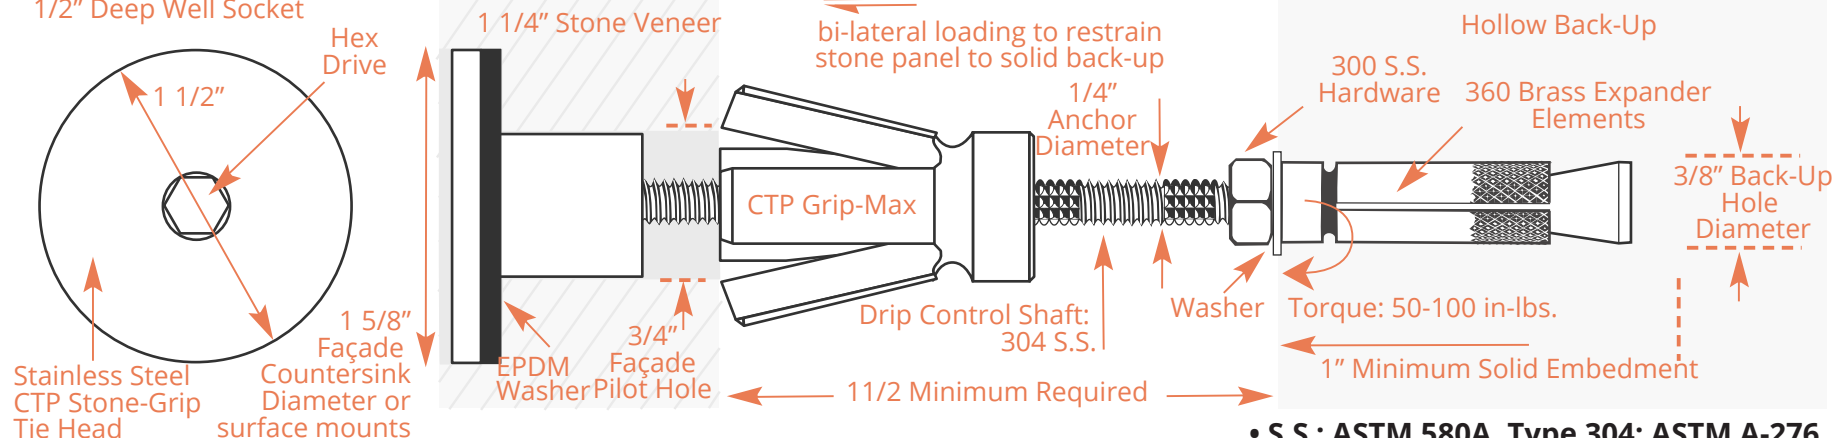

- **S.S : ASTM 580A, Type 304; ASTM A-276**

LENGTH			HEAD STYLE	
☐ 5 1/2" (138mm)	☐ 7 1/2" (188mm)	☐ 9 1/2" (238mm)	☐ Hex (as shown)	Other _____ Color _____
☐ 6 1/2" (163mm)	☐ 8 1/2" (213mm)	☐ Other _____	☐ Standard	☐ Polished ☐ Powder Coat ☐ Bead Blast
			Other _____	

SPECIFICATIONS

☐	62320-112N450	6100-2 Series Stone Grip Anchor 1-1/2" Dia SS Head x 4-1/2" SS Shaft	CTP-6144-2
☐	62320-112N550	6100-2 Series Stone Grip Anchor 1-1/2" Dia SS Head x 5-1/2" SS Shaft	CTP-6154-2
☐	62320-112N650	6100-2 Series Stone Grip Anchor 1-1/2" Dia SS Head x 6-1/2" SS Shaft	CTP-6164-2

DATE:	APPROVED BY:	DRAWN BY:
SCALE: NTS		REVISED:
PROJECT:		
CUSTOMER:		DRAWING NUMBER:



PROSOCO

CUSTOMER CARE 800-255-4255 // PROSOCO.COM