


CTP STONE-GRIP TIE

CTP 6300-2LD Series Anchor

SUBMITTAL

Requires CTP Hex Key,
CTP 501 Setting Tool,
Toggle Positioning Tool

Type 2 : Wind load Type 2LD: Light Duty restraint for uni-direction loading to wood or steel back-up.

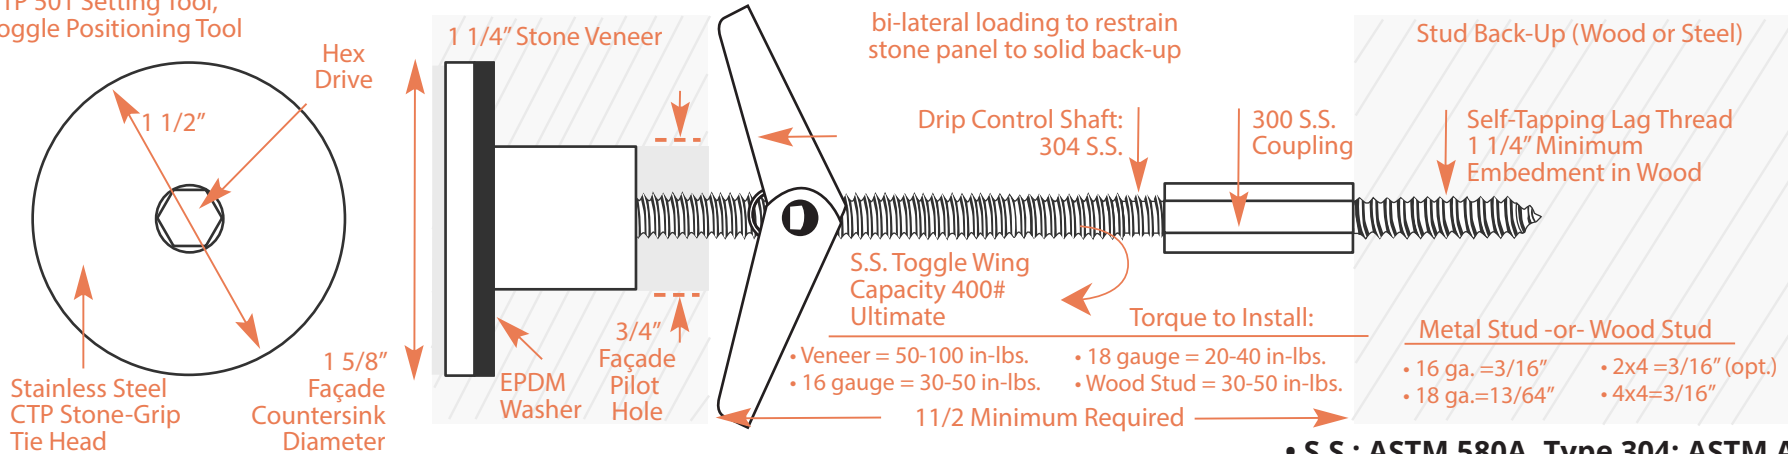

• S.S. : ASTM 580A, Type 304; ASTM A-276

LENGTH			HEAD STYLE		
<input type="checkbox"/> 5 1/2" (138mm)	<input type="checkbox"/> 7 1/2" (188mm)	<input type="checkbox"/> 9 1/2" (238mm)	<input type="checkbox"/> Hex (as shown)	Other _____	Color _____
<input type="checkbox"/> 6 1/2" (163mm)	<input type="checkbox"/> 8 1/2" (213mm)	<input type="checkbox"/> Other _____	<input type="checkbox"/> Standard	<input type="checkbox"/> Polished	<input type="checkbox"/> Powder Coat
			<input type="checkbox"/> Bead Blast	Other _____	

SPECIFICATIONS

- 62355-150N450 6300-2LD Series Stone Grip Anchor 1-1/2" Dia SS Head X 4-1/2" SS shaft CTP-6334-2LD
- 62355-150N550 6300-2LD Series Stone Grip Anchor 1-1/2" Dia SS Head X 5-1/2" SS shaft CTP-6354-2LD
- 62355-150N650 6300-2LD Series Stone Grip Anchor 1-1/2" Dia SS Head X 6-1/2" SS shaft CTP-6364-2LD
- 62355-150N750 6300-2LD Series Stone Grip Anchor 1-1/2" Dia SS Head X 7-1/2" SS shaft CTP-6374-2LD

DATE:	APPROVED BY:	DRAWN BY: CMS
SCALE: NTS		REVISED:
PROJECT:		
CUSTOMER:		DRAWING NUMBER: