



Pallet Tag Program Laboratory Report

SiteOne – Solstice Stone Roswell, GA



Project No. 2608-01 PTP

Prepared For:



PROSOCO

Prepared By:

J. Lucas Comadoll

J. Lucas Comadoll
Chemist
AMT Laboratories

September 2026



Laboratory Report

AMT Laboratories • 3741 Greenway Circle • Lawrence, Kansas 66046 • (888) 376-3600

FOR: Jake Burke, SiteOne Landscape Supply
cc: Luis De Simas, Regional Sales Manager, PROSOCO, Inc.
Clay Witt, Director of Sales – South, PROSOCO, Inc.
Ken Rathbun, Director of Product Strategy – CPG, PROSOCO, Inc.

SUBJECT: SiteOne – Solstice Stone
Roswell, GA
Pallet Tag Evaluation

DATE: September 30, 2026
PROJECT: 2608-01 PTP

SAMPLES SUBMITTED: Eleven types of Solstice dimensional natural stone provided by SiteOne Landscape Supply

Brand	Type	Name	Finish	Color	Size
Solstice	Marble	“Diana Royal”	Leathered	Buff, Brown	Various Sizes
Solstice	Marble	“Ice White”	Sandblasted	White, Gray	Various Sizes
Solstice	Marble	“Tundra Gray”	Leathered	Brown, Gray	Various Sizes
Solstice	Travertine	“Ivory”	Tumbled	Buff	Various Sizes
Solstice	Travertine	“Silver”	Tumbled	Gray	Various Sizes
Solstice	Travertine	“Walnut”	Tumbled	Buff, Brown	Various Sizes
Solstice	Limestone	“Shellstone”	Tumbled	Buff	Various Sizes
Solstice	Limestone	“SW Black”*	Hand Cut	Black	Various Sizes
Solstice	Sandstone	“SW Buff”*	Hand Cut	Brown, Gray	Various Sizes
Solstice	Sandstone	“SW Grey”*	Hand Cut	Gray	Various Sizes
Solstice	Sandstone	“SW Tan”*	Hand Cut	Buff, Brown	Various Sizes

***NOTE:** SW is an abbreviation for Stonewright according to the SiteOne Landscape Supply website.

SUBMITTED BY: Jake Burke
SiteOne Landscape Supply
300 Colonial Center Parkway
Suite 600
Roswell, GA 30076

PURPOSE OF TEST:

- To determine whether Enviro Klean® 2010 All Surface Cleaner or Enviro Klean® Klean 'N Release Cleaner cause any adverse effects to the submitted samples.
- To evaluate the color and sheen enhancement characteristics of specific PROSOCO, Inc. products on the submitted samples.
- To determine the most appropriate PROSOCO, Inc. water repellent for the submitted samples.

PRODUCTS EVALUATED:

Adverse Effects	Dilution:
Enviro Klean® 2010 All Surface Cleaner	1:10
Enviro Klean® Klean 'N Release Cleaner	1:10

Color and Sheen Enhancement	Dilution:
Sure Klean® Weather Seal Natural Stone Treatment WB	N/A*
Sure Klean® Weather Seal Color Enhancer WB	N/A*

Water Repellency	Dilution:
Sure Klean® Weather Seal Natural Stone Treatment WB	N/A*
Sure Klean® Weather Seal Color Enhancer WB	N/A*

***NOTE: Per the product data sheet instructions, only use the product in concentrate. Do not dilute.**

TEST METHODS: Adverse Effects

Enviro Klean® 2010 All Surface Cleaner and Enviro Klean® Klean 'N Release Cleaner were evaluated to determine if either of the cleaners cause any adverse effects when used on the submitted natural stone. The samples were visually examined following the procedure below based on the following:

Surface Finish Removal is the visual examination of the sample comparing the surface finish of the uncleaned surface to the surface finish cleaned with selected product(s) at given dilutions.

Substrate Deterioration is the visual examination of the sample comparing the uncleaned surface to surfaces cleaned with selected product(s) at given dilutions looking for any potential erosion/digestion of the sample.

Color Change is the visual examination comparing the color of the uncleaned surface to the color of surfaces cleaned with selected products at given dilutions.

Staining is the visual examination for changes that are the result of a chemical reaction that leaves a staining precipitate.

The following is the scale used for reporting results of both categories:

- 0 – **No change** compared to uncleaned surface
- 1 – **Slight change** compared to uncleaned surface
- 2 – **Moderate change** compared to uncleaned surface
- 3 – **Significant change** compared to uncleaned surface

Cleaning Procedure:


1. Pre-wet the surface and apply diluted cleaning solution according to PROSOCO, Inc. Product Data Sheet.
2. Allow for an appropriate dwell time and periodically agitate:
 - 2010 All Surface Cleaner 10 minutes
 - Klean 'N Release 10 minutes
3. Reapply cleaning solution; do not let cleaner dry into sample.
4. Rinse thoroughly with plenty of fresh water.*
5. Allow the sample to dry for at least 18 hours and visually examine.
6. Compare the uncleaned surfaces to the cleaned surfaces for the best match.

***Rinsing Equipment** – Masonry washing equipment generating approximately 700-800 psi with a water flow rate of 8 gallons per minute delivered through a 40-degree fan spray tip was used for rinsing.

TEST RESULTS AND PHOTOGRAPHS: Adverse Effects

Name: "Diana Royal" Marble					
Product	Dilution	Surface Finish Removal	Substrate Deterioration	Color Change	Staining
2010 All Surface Cleaner	1:10	0	0	0	0
Klean 'N Release	1:10	0	0	0	0


"Diana Royal" Marble After Cleaning

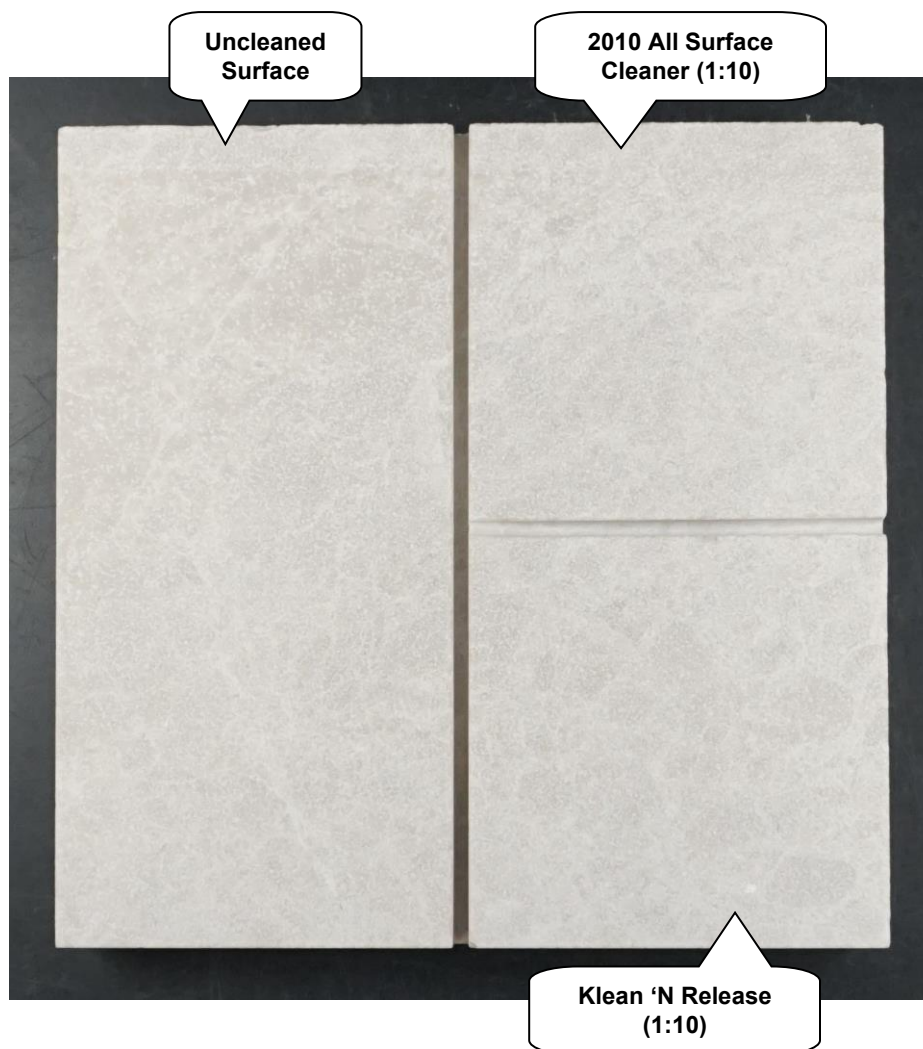

TEST RESULTS AND PHOTOGRAPHS: Adverse Effects (cont.)

Name: "Ice White" Marble					
Product	Dilution	Surface Finish Removal	Substrate Deterioration	Color Change	Staining
2010 All Surface Cleaner	1:10	0	0	0	0
Klean 'N Release	1:10	0	0	0	0


"Ice White" Marble After Cleaning

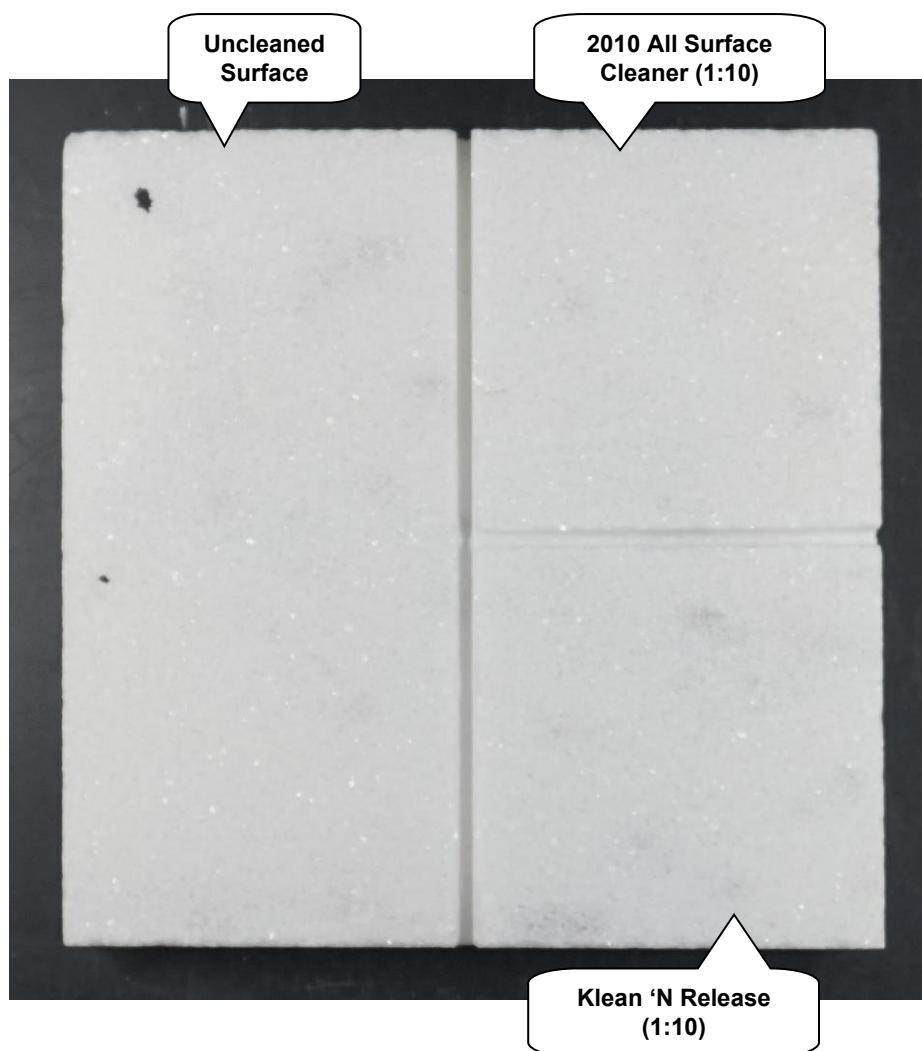

TEST RESULTS AND PHOTOGRAPHS: Adverse Effects (cont.)

Name: "Tundra Gray" Marble					
Product	Dilution	Surface Finish Removal	Substrate Deterioration	Color Change	Staining
2010 All Surface Cleaner	1:10	0	0	0	0
Klean 'N Release	1:10	0	0	0	0

"Tundra Gray" Marble After Cleaning

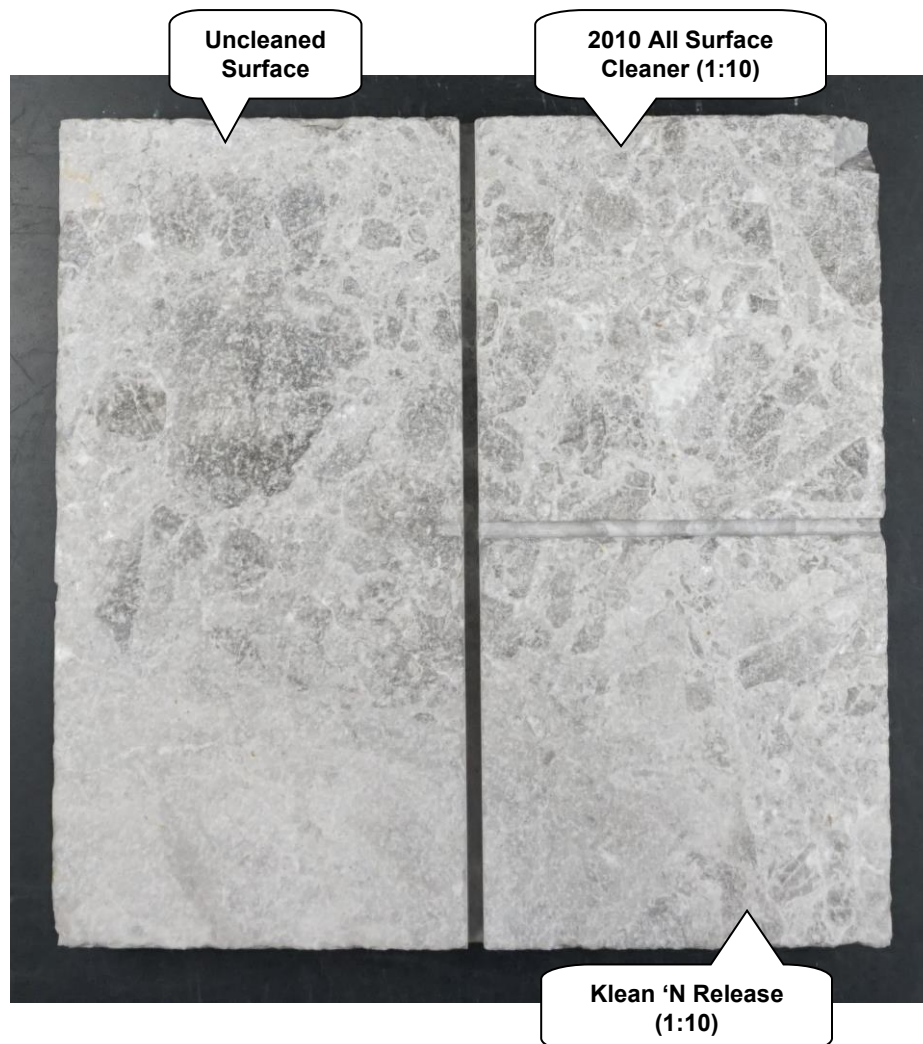

TEST RESULTS AND PHOTOGRAPHS: Adverse Effects (cont.)

Name: "Ivory" Travertine					
Product	Dilution	Surface Finish Removal	Substrate Deterioration	Color Change	Staining
2010 All Surface Cleaner	1:10	0	0	0	0
Klean 'N Release	1:10	0	0	0	0

"Ivory" Travertine After Cleaning



TEST RESULTS AND PHOTOGRAPHS: Adverse Effects (cont.)

Name: "Silver" Travertine					
Product	Dilution	Surface Finish Removal	Substrate Deterioration	Color Change	Staining
2010 All Surface Cleaner	1:10	0	0	0	0
Klean 'N Release	1:10	0	0	0	0

"Silver" Travertine After Cleaning



TEST RESULTS AND PHOTOGRAPHS: Adverse Effects (cont.)

Name: "Walnut" Travertine					
Product	Dilution	Surface Finish Removal	Substrate Deterioration	Color Change	Staining
2010 All Surface Cleaner	1:10	0	0	0	0
Klean 'N Release	1:10	0	0	0	0

"Walnut" Travertine After Cleaning



TEST RESULTS AND PHOTOGRAPHS: Adverse Effects (cont.)

Name: "Shellstone" Limestone					
Product	Dilution	Surface Finish Removal	Substrate Deterioration	Color Change	Staining
2010 All Surface Cleaner	1:10	0	0	0	0
Klean 'N Release	1:10	0	0	0	0


"Shellstone" Limestone After Cleaning



TEST RESULTS AND PHOTOGRAPHS: Adverse Effects (cont.)

Name: "SW Black" Limestone					
Product	Dilution	Surface Finish Removal	Substrate Deterioration	Color Change	Staining
2010 All Surface Cleaner	1:10	0	0	0	0
Klean 'N Release	1:10	0	0	0	0


"SW Black" Limestone After Cleaning

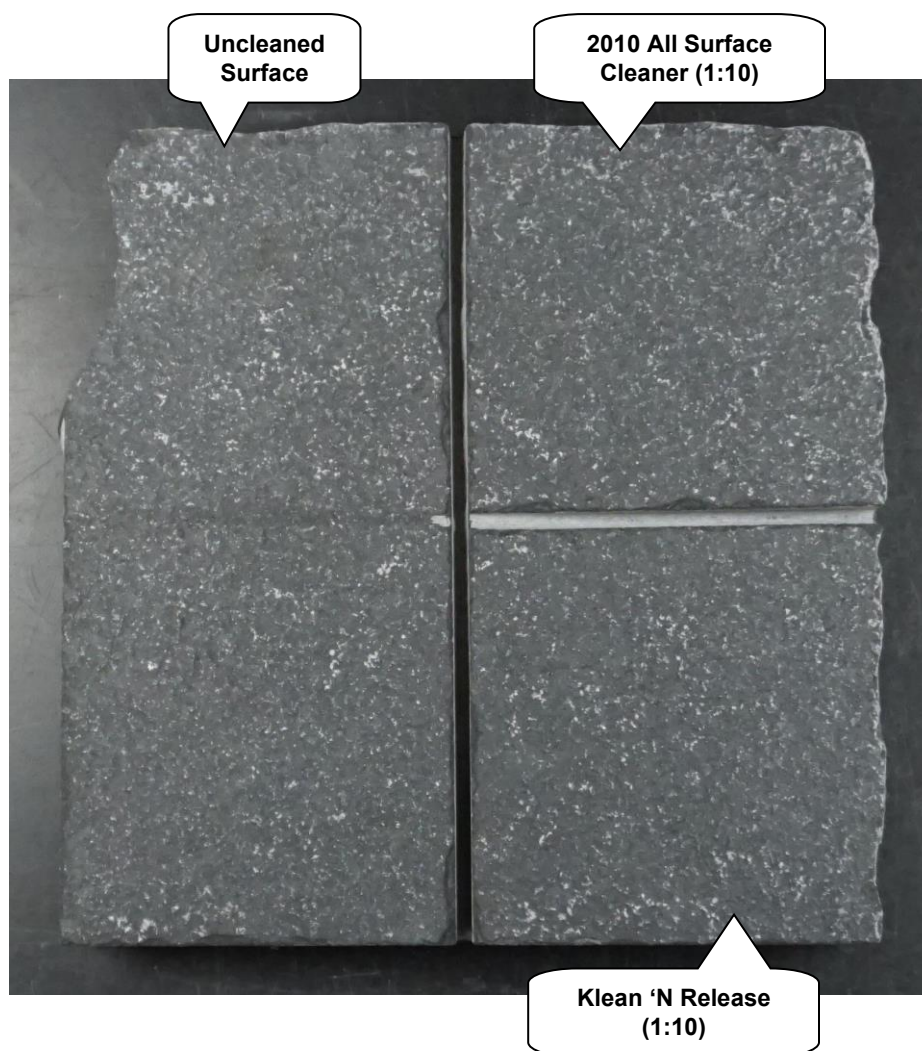

TEST RESULTS AND PHOTOGRAPHS: Adverse Effects (cont.)

Name: "SW Buff" Sandstone					
Product	Dilution	Surface Finish Removal	Substrate Deterioration	Color Change	Staining
2010 All Surface Cleaner	1:10	0	0	0	0
Klean 'N Release	1:10	0	0	0	0

"SW Buff" Sandstone After Cleaning

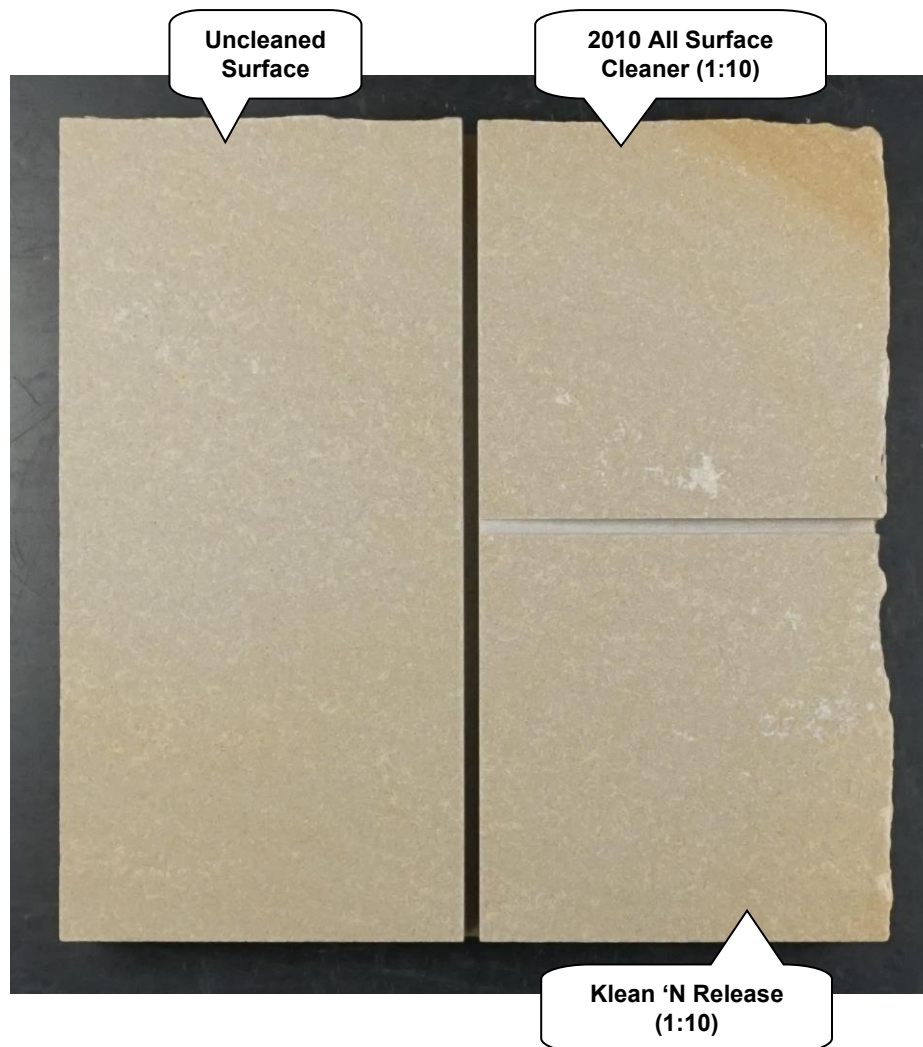

TEST RESULTS AND PHOTOGRAPHS: Adverse Effects (cont.)

Name: "SW Grey" Sandstone					
Product	Dilution	Surface Finish Removal	Substrate Deterioration	Color Change	Staining
2010 All Surface Cleaner	1:10	0	0	0	0
Klean 'N Release	1:10	0	0	0	0


"SW Grey" Sandstone After Cleaning



TEST RESULTS AND PHOTOGRAPHS: Adverse Effects (cont.)

Name: "SW Tan" Sandstone					
Product	Dilution	Surface Finish Removal	Substrate Deterioration	Color Change	Staining
2010 All Surface Cleaner	1:10	0	0	0	0
Klean 'N Release	1:10	0	0	0	0

"SW Tan" Sandstone After Cleaning

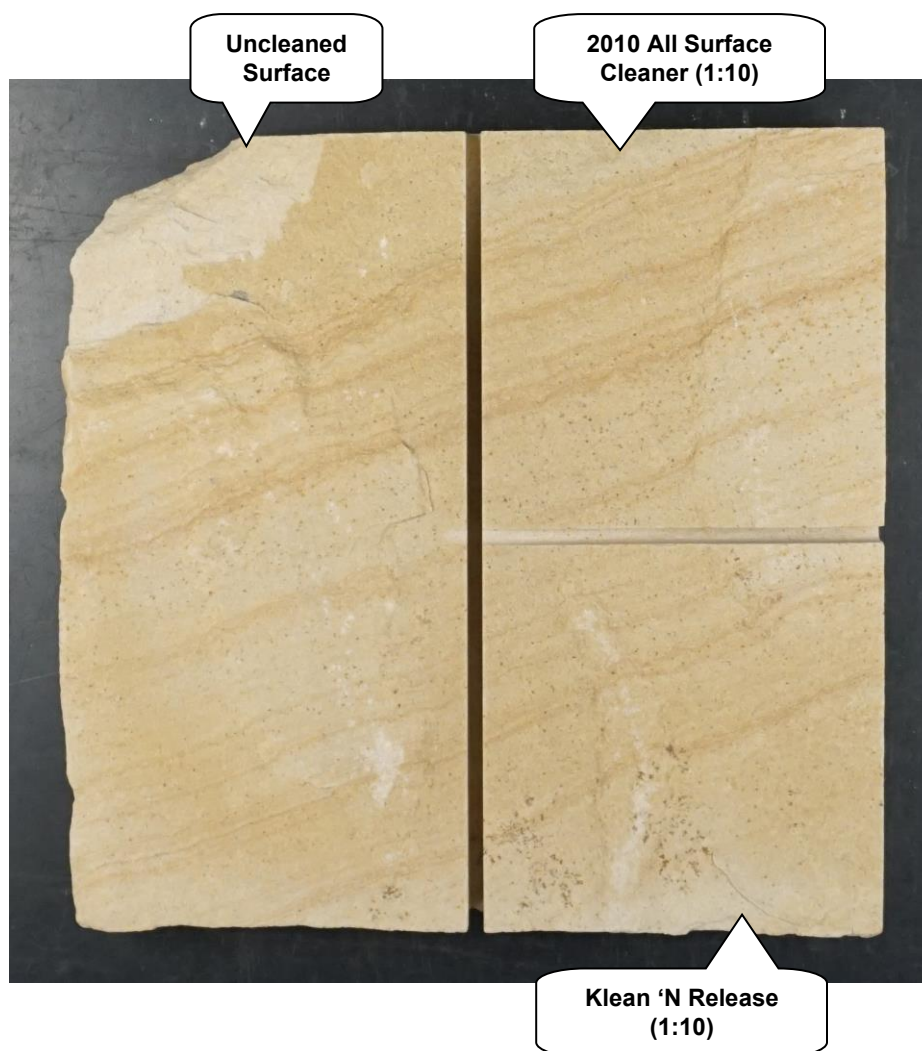

CONCLUSIONS: Adverse Effects

In the adverse effects tests conducted, neither Enviro Klean® 2010 All Surface Cleaner nor Enviro Klean® Klean 'N Release Cleaner resulted in any change to the appearance of the submitted natural stone.

When choosing the most appropriate product for the desired result:

- For cleaning and degreasing light-to-heavily soiled concrete – test Enviro Klean® 2010 All Surface Cleaner®
- For delicate substrates and all-purpose cleaning – test Enviro Klean® Klean 'N Release Cleaner

It is recommended that the selected cleaners always be used in the lowest possible concentration. Apply all products in accordance with the manufacturer's recommendations provided on container labels and product data sheets. On-site testing should be conducted to determine the most appropriate cleaning product and procedures for a particular project. See product literature for additional application and product information.

RECOMMENDATIONS: Adverse Effects

Recommendations for cleaning the natural stone submitted by SiteOne Landscape Supply, Roswell, GA are provided in the chart below. Recommendations are based on the cleaner and dilution that provided the best match to the uncleaned surface.

Sample	Adverse Effects
"Diana Royal" Marble	Enviro Klean® 2010 All Surface Cleaner (1:10) OR Enviro Klean® Klean 'N Release Cleaner (1:10)
"Ice White" Marble	
"Tundra Gray" Marble	
"Ivory" Travertine	
"Silver" Travertine	
"Walnut" Travertine	
"Shellstone" Limestone	
"SW Black" Limestone	
"SW Buff" Sandstone	
"SW Grey" Sandstone	
"SW Tan" Sandstone	

The most appropriate cleaner and dilution should be determined on the specific job-site, and will be dependent primarily on the nature and severity of soiling present at that location.

Apply all products in accordance with the manufacturer's recommendation provided on container labels and product data sheets. On-site testing should be conducted to determine the most appropriate cleaning product and procedures for a particular project. See product literature for additional application and product information.

SAMPLE PREPARATION: Treatment Application

Prior to treatment application, the submitted natural stone samples were cleaned with Enviro Klean® 2010 All Surface Cleaner diluted with ten parts water in accordance with the current PROSOCO, Inc. Product Data Sheet instructions. After the samples had dried for at least 24 hours, each treatment was applied in accordance with the current PROSOCO, Inc. Product Data Sheet instructions and allowed to cure for at least 72 hours prior to testing.

TEST METHODS: Color and Sheen Enhancement

After 72 hours, a visual evaluation was made comparing the untreated control surface to the treated surface to determine the effectiveness of the evaluated products in providing color and/or sheen enhancement to the submitted natural stone samples.

The following is the scale used for reporting results of both categories:


- 0 – **No enhancement** compared to untreated surface
- 1 – **Slight enhancement** compared to untreated surface
- 2 – **Moderate enhancement** compared to untreated surface
- 3 – **Significant enhancement** compared to untreated surface

NOTE: Due to the surface irregularities and varying nature of the natural stone, the substrate's color and sheen enhancement may vary from one area of the sample to another, as well as from sample to sample.

TEST RESULTS AND PHOTOGRAPHS: Color and Sheen Enhancement

"Diana Royal" Marble	Color Enhancement	Sheen Enhancement
Sure Klean® Weather Seal Natural Stone Treatment WB	0	0
Sure Klean® Weather Seal Color Enhancer WB	1	0


"Diana Royal" Marble After Treatment Application

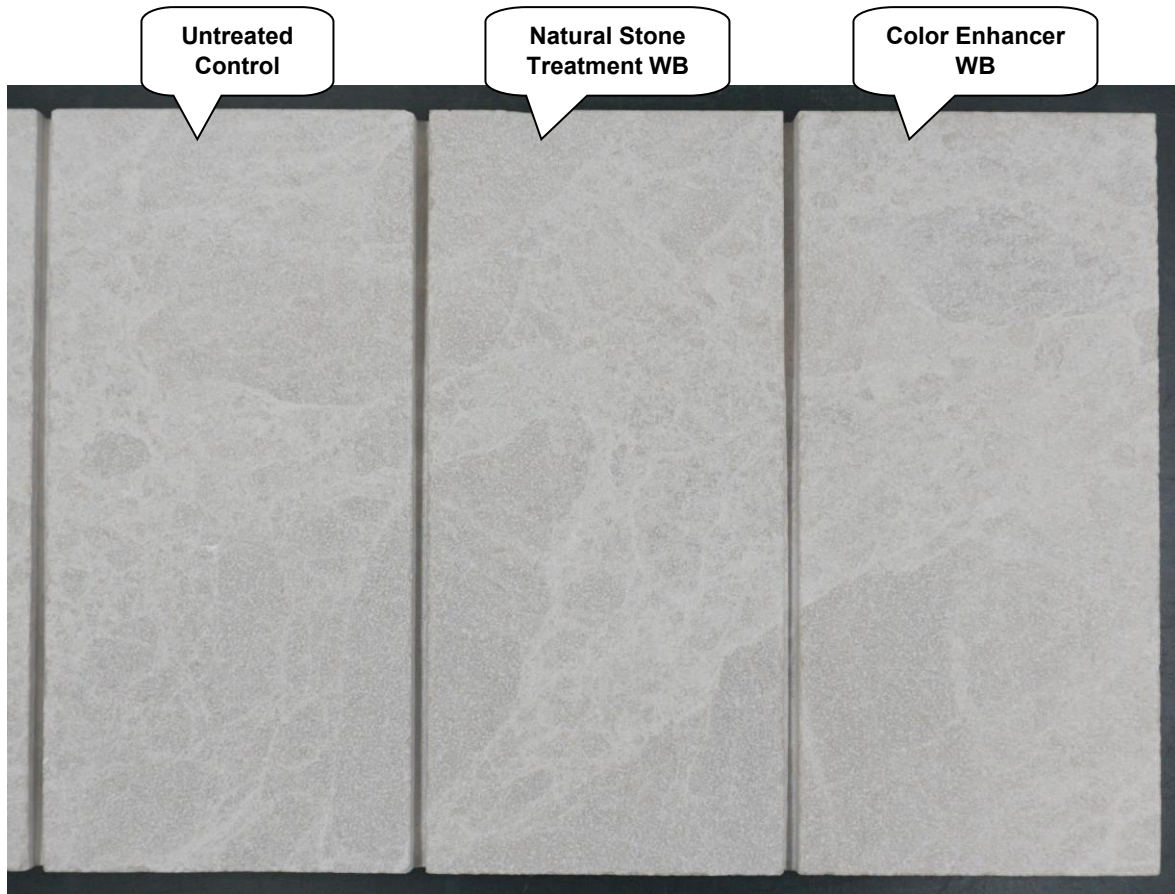

TEST RESULTS AND PHOTOGRAPHS: Color and Sheen Enhancement (cont.)

"Ice White" Marble	Color Enhancement	Sheen Enhancement
Sure Klean® Weather Seal Natural Stone Treatment WB	0	0
Sure Klean® Weather Seal Color Enhancer WB	1	0


"Ice White" Marble After Treatment Application

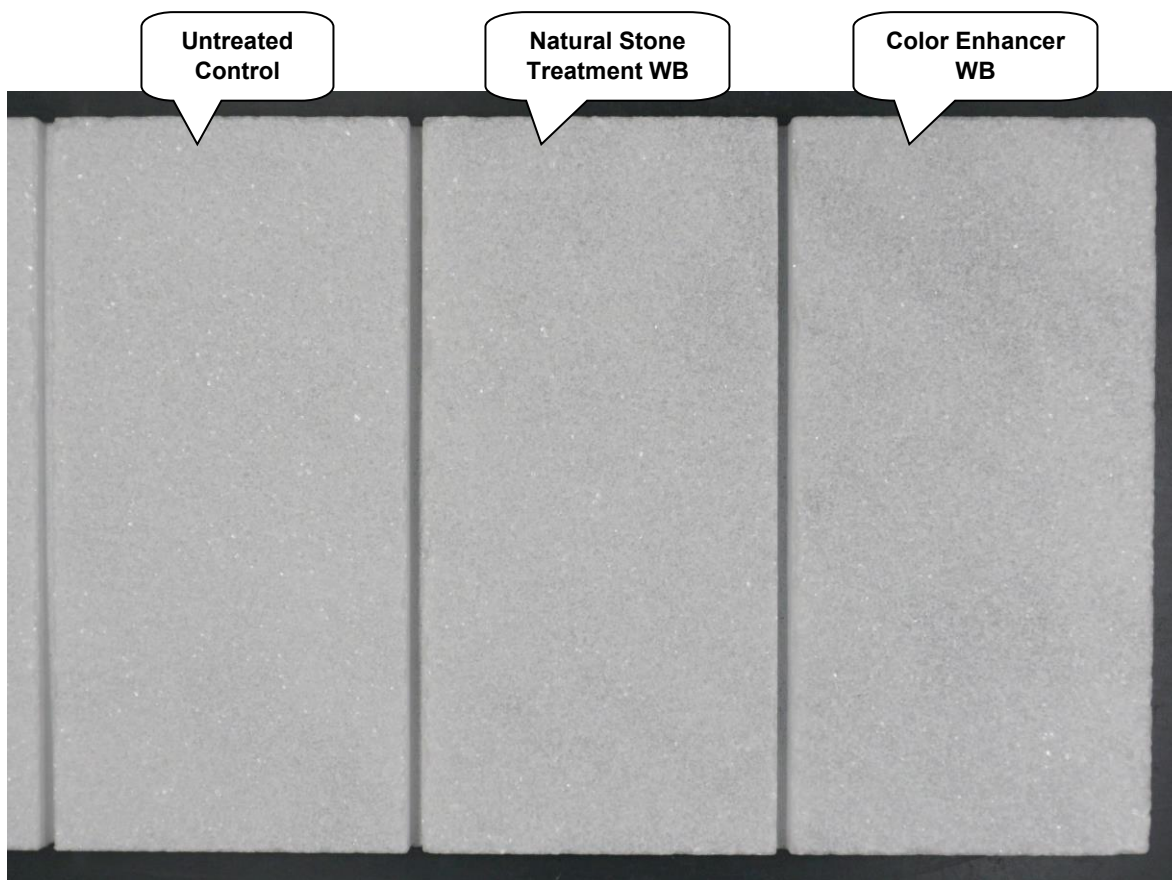

TEST RESULTS AND PHOTOGRAPHS: Color and Sheen Enhancement (cont.)

"Tundra Gray" Marble	Color Enhancement	Sheen Enhancement
Sure Klean® Weather Seal Natural Stone Treatment WB	0	0
Sure Klean® Weather Seal Color Enhancer WB	1	0


"Tundra Gray" Marble After Treatment Application

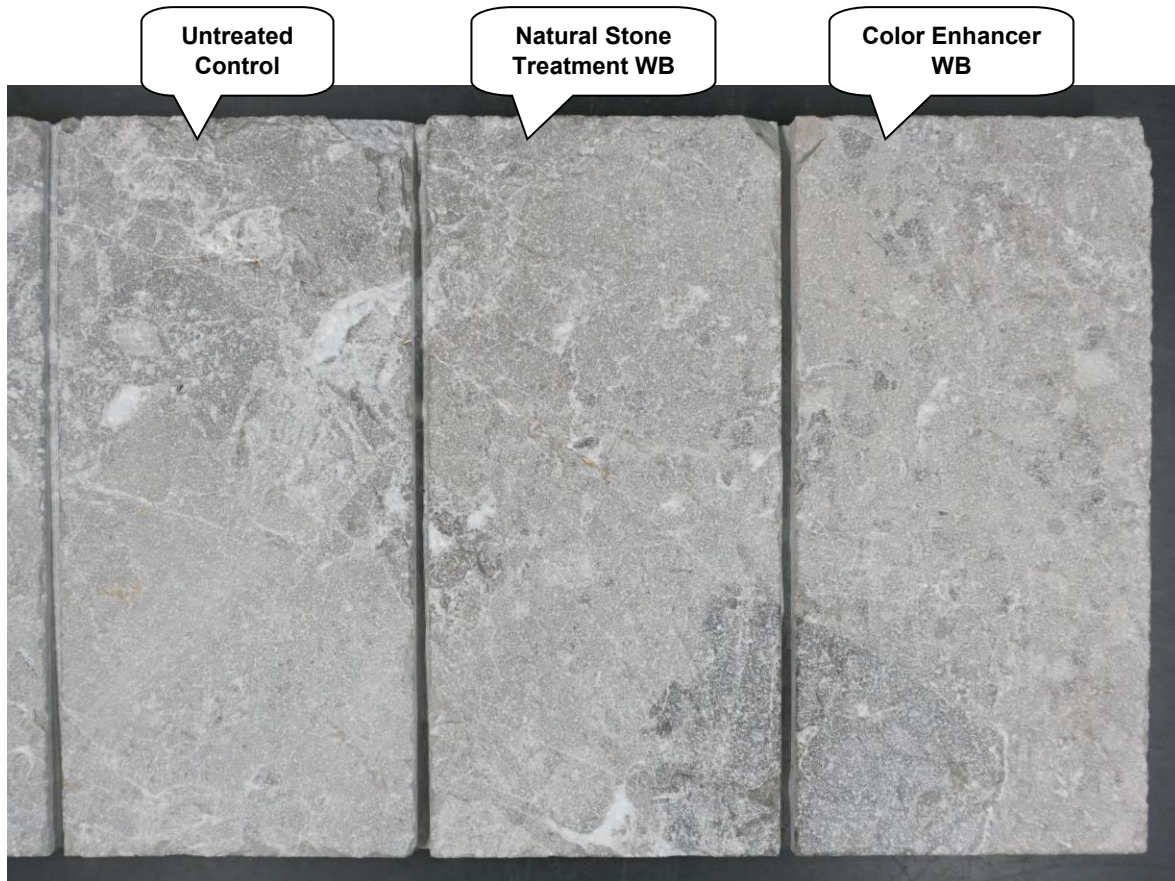

TEST RESULTS AND PHOTOGRAPHS: Color and Sheen Enhancement (cont.)

"Ivory" Travertine	Color Enhancement	Sheen Enhancement
Sure Klean® Weather Seal Natural Stone Treatment WB	0	0
Sure Klean® Weather Seal Color Enhancer WB	0	0

"Ivory" Travertine After Treatment Application

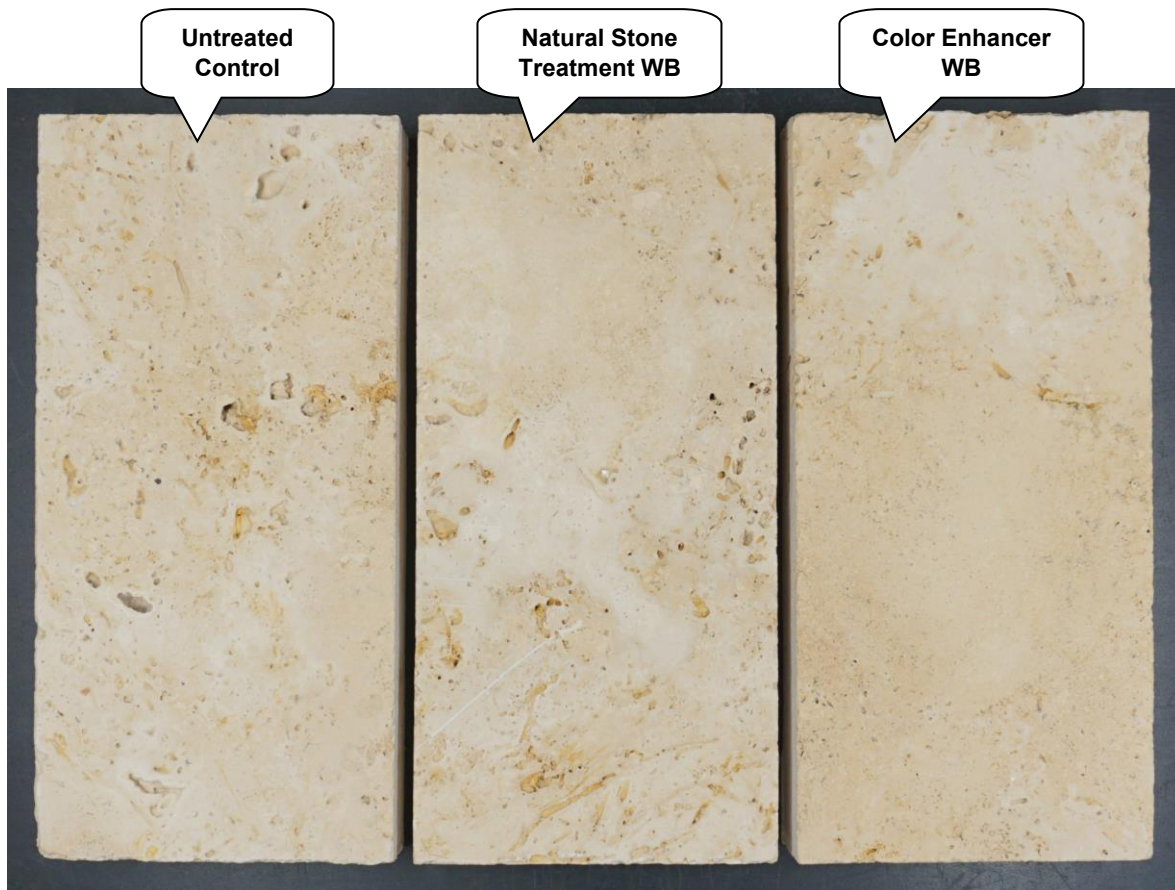

TEST RESULTS AND PHOTOGRAPHS: Color and Sheen Enhancement (cont.)

"Silver" Travertine	Color Enhancement	Sheen Enhancement
Sure Klean® Weather Seal Natural Stone Treatment WB	0	0
Sure Klean® Weather Seal Color Enhancer WB	0	0

"Silver" Travertine After Treatment Application



TEST RESULTS AND PHOTOGRAPHS: Color and Sheen Enhancement (cont.)

"Walnut" Travertine	Color Enhancement	Sheen Enhancement
Sure Klean® Weather Seal Natural Stone Treatment WB	0	0
Sure Klean® Weather Seal Color Enhancer WB	0	0


"Walnut" Travertine After Treatment Application



TEST RESULTS AND PHOTOGRAPHS: Color and Sheen Enhancement (cont.)

"Shellstone" Limestone	Color Enhancement	Sheen Enhancement
Sure Klean® Weather Seal Natural Stone Treatment WB	0	0
Sure Klean® Weather Seal Color Enhancer WB	0	0


"Shellstone" Limestone After Treatment Application

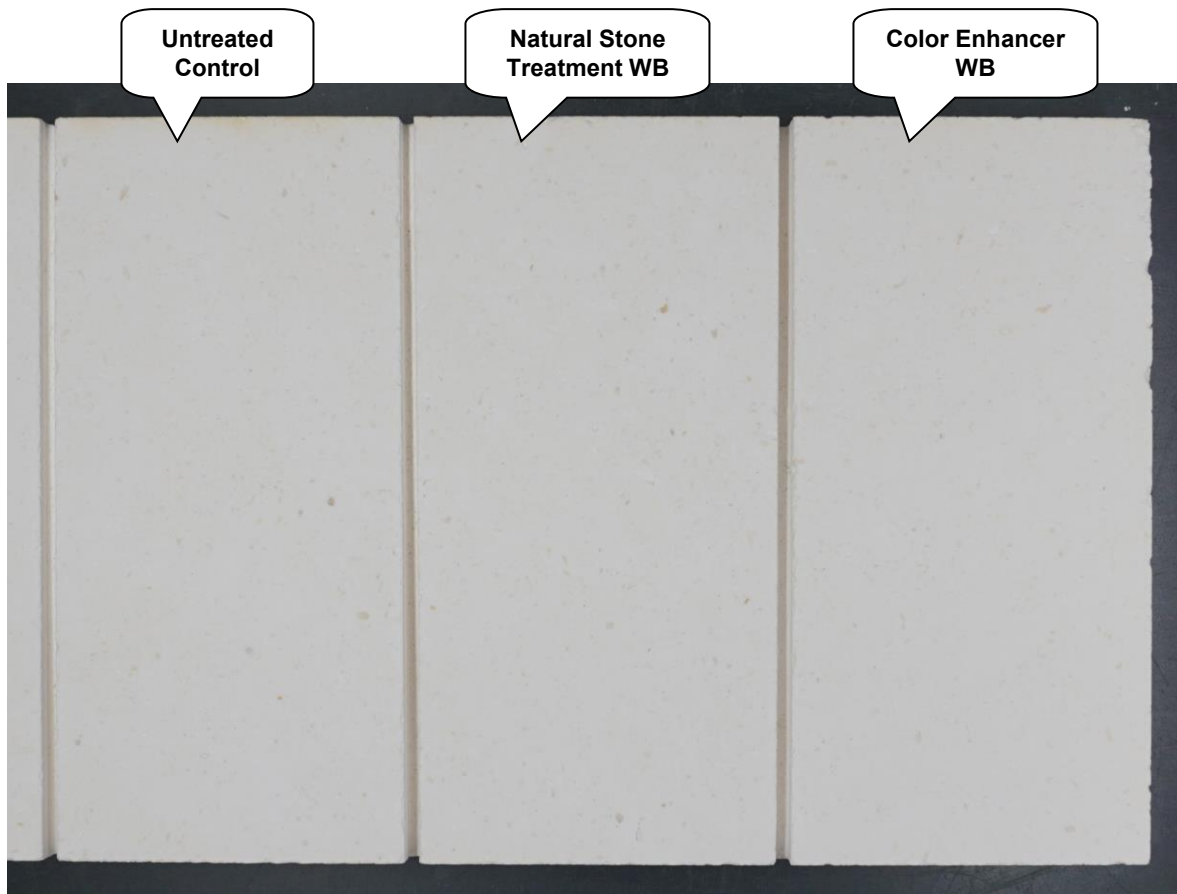

TEST RESULTS AND PHOTOGRAPHS: Color and Sheen Enhancement (cont.)

"SW Black" Limestone	Color Enhancement	Sheen Enhancement
Sure Klean® Weather Seal Natural Stone Treatment WB	2	0
Sure Klean® Weather Seal Color Enhancer WB	2	0

"SW Black" Limestone After Treatment Application

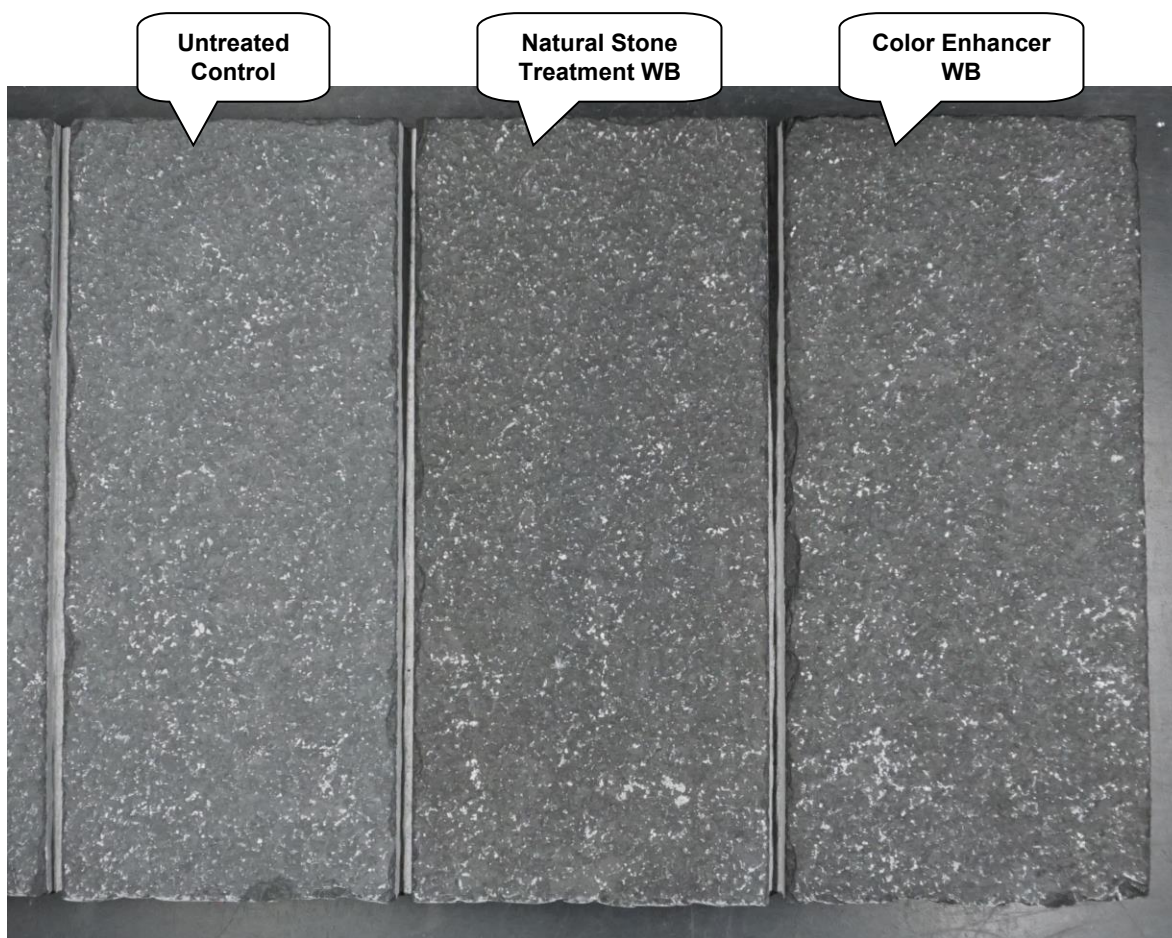

TEST RESULTS AND PHOTOGRAPHS: Color and Sheen Enhancement (cont.)

"SW Buff" Sandstone	Color Enhancement	Sheen Enhancement
Sure Klean® Weather Seal Natural Stone Treatment WB	0	0
Sure Klean® Weather Seal Color Enhancer WB	1	0


"SW Buff" Sandstone After Treatment Application



TEST RESULTS AND PHOTOGRAPHS: Color and Sheen Enhancement (cont.)

"SW Grey" Sandstone	Color Enhancement	Sheen Enhancement
Sure Klean® Weather Seal Natural Stone Treatment WB	0	0
Sure Klean® Weather Seal Color Enhancer WB	0	0


"SW Grey" Sandstone After Treatment Application

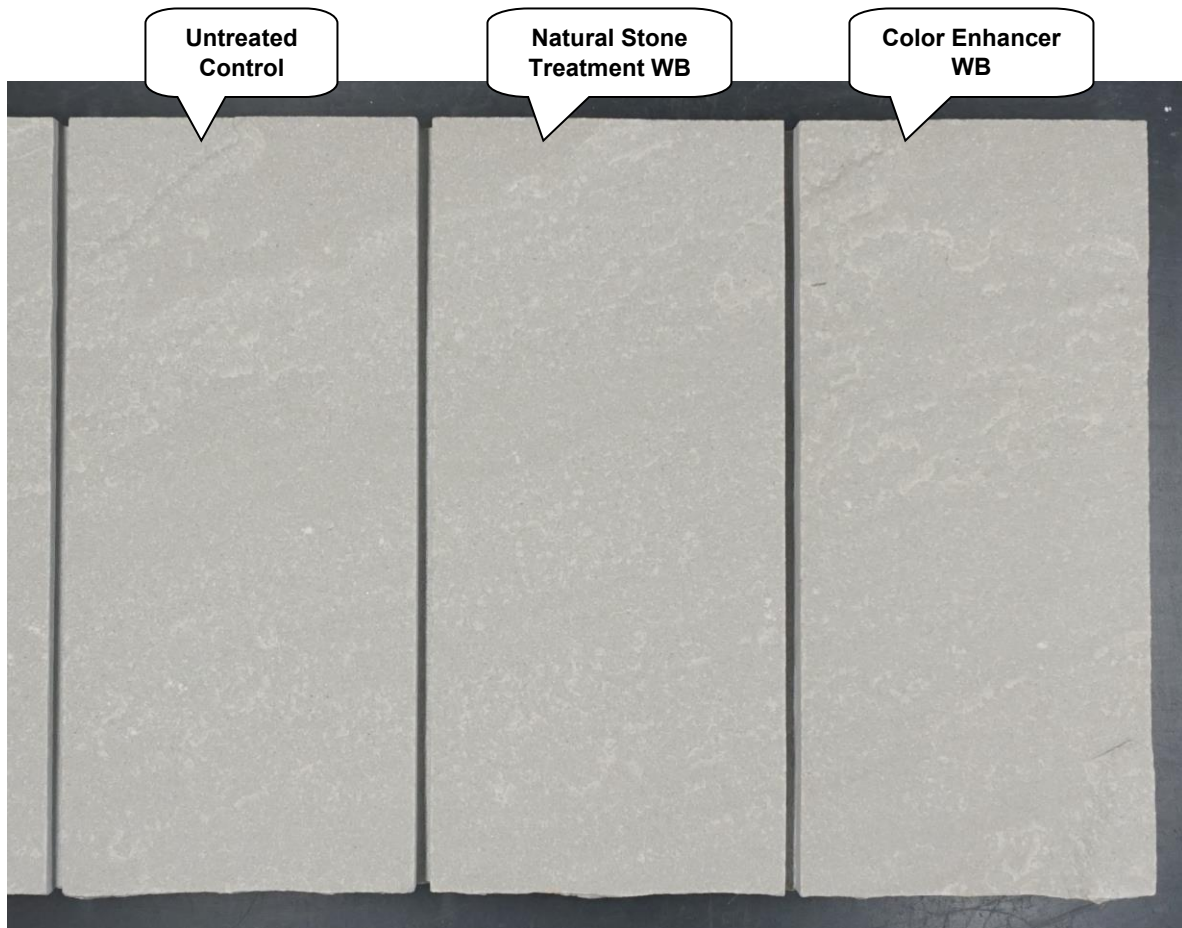

TEST RESULTS AND PHOTOGRAPHS: Color and Sheen Enhancement (cont.)

"SW Tan" Sandstone	Color Enhancement	Sheen Enhancement
Sure Klean® Weather Seal Natural Stone Treatment WB	0	0
Sure Klean® Weather Seal Color Enhancer WB	0	0

"SW Tan" Sandstone After Treatment Application

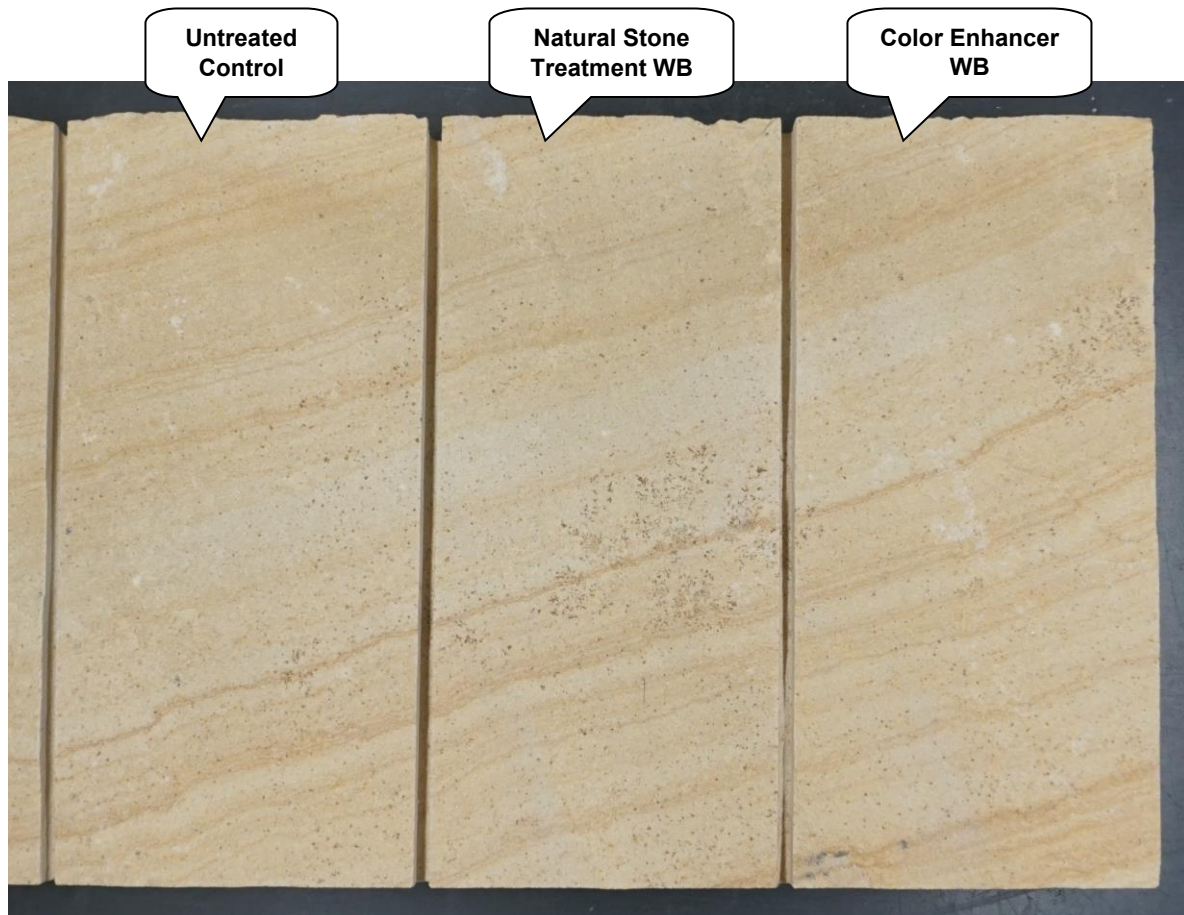

CONCLUSIONS: Color and Sheen Enhancement

The treatments evaluated provided a range of color enhancement results, from no change in appearance to a moderate change depending on the natural stone type and treatment.

None of the other treatments provided any sheen enhancement to any of the submitted samples.

Please refer to pages 18-31 of the report for individual recommendations based on the desired result.

Enhancement levels may vary by substrate color, lighting, orientation, application method, and other variables. Always test in the field to confirm intended results.

Apply all products in accordance with the manufacturer's recommendations provided on container labels and product data sheets. On-site testing should be conducted to determine the most appropriate treatment and procedures for a particular project. See product literature for additional application and product information.

RECOMMENDATIONS: Color and Sheen Enhancement

Recommendations for color and sheen enhancement for each type of natural stone submitted by SiteOne Landscape Supply, Roswell, GA are provided in the chart below. Recommendations are based on the treatment(s) that proved most effective.

Sample	Color and Sheen Enhancement
"Diana Royal" Marble	Please refer to pages 18-31 of the report for individual recommendations based on the desired result.
"Ice White" Marble	
"Tundra Gray" Marble	
"Ivory" Travertine	
"Silver" Travertine	
"Walnut" Travertine	
"Shellstone" Limestone	
"SW Black" Limestone	
"SW Buff" Sandstone	
"SW Grey" Sandstone	
"SW Tan" Sandstone	

Apply all products in accordance with the manufacturer's recommendation provided on container labels and product data sheets. On-site testing should be conducted to determine the most appropriate treatment and procedures for a particular project. See product literature for additional application and product information.

TEST METHODS: Protective Water Repellents

Water Absorption Tube Test: Horizontal RILEM II.4, 5.0 milliliters, 20 minutes

The water absorption tube test simulating wind driven rain conditions was performed on the submitted samples. Tests were run with 5.0-milliliter head pressures. Filled to 5.0 milliliters, a water absorption tube produces a 103 mph dynamic wind pressure. See RILEM II.4 Tech Note for additional information.

The ranking system used to evaluate the effectiveness of the products applied to each submitted sample is as follows:

AA = "Above Average" correlates to less than or equal to 20% of the maximum untreated absorption.

A = "Average" correlates to less than or equal to 50% of the maximum untreated absorption.

BA = "Below Average" correlates to greater than 50% of the maximum untreated absorption.

EXAMPLE: If RILEM tubes applied to an untreated sample result in loss of 5.0 ml of water or more, then:

A rating of **AA** *Above Average* water repellent performance would be reported for treatments which result in a loss of no more than:

$$5.0 \text{ mL} \times 20\% = \mathbf{1.0 \text{ mL}}$$

A rating of **A** *Average* water repellent performance would be reported for treatments which result in a loss of no more than:

$$5.0 \text{ mL} \times 50\% = \mathbf{2.5 \text{ mL}}$$

A rating of **BA** *Below Average* water repellent performance would be reported for treatments which result in a loss of more than:

$$5.0 \text{ mL} \times 50\% = \mathbf{2.5 \text{ mL}}$$



TEST RESULTS AND PHOTOGRAPHS: Protective Water Repellents
Water Absorption Tube Test: Horizontal RILEM II.4, 5.0 milliliters, 20 minutes
AA = Above Average **A** = Average

BA = Below Average

"Diana Royal" Marble	Results in mL loss	<u>Ranking</u>
Untreated Control	-0.2	--
Sure Klean® Weather Seal Natural Stone Treatment WB	-0.0	<u>AA</u>
Sure Klean® Weather Seal Color Enhancer WB	-0.0	<u>AA</u>

"Ice White" Marble	Results in mL loss	<u>Ranking</u>
Untreated Control	-0.0	--
Sure Klean® Weather Seal Natural Stone Treatment WB	-0.0	<u>AA</u>
Sure Klean® Weather Seal Color Enhancer WB	-0.0	<u>AA</u>

"Tundra Gray" Marble	Results in mL loss	<u>Ranking</u>
Untreated Control	-0.0	--
Sure Klean® Weather Seal Natural Stone Treatment WB	-0.0	<u>AA</u>
Sure Klean® Weather Seal Color Enhancer WB	-0.0	<u>AA</u>

"Ivory" Travertine	Results in mL loss	<u>Ranking</u>
Untreated Control	-0.1	--
Sure Klean® Weather Seal Natural Stone Treatment WB	-0.0	<u>AA</u>
Sure Klean® Weather Seal Color Enhancer WB	-0.0	<u>AA</u>

TEST RESULTS AND PHOTOGRAPHS: Protective Water Repellents (cont.)
Water Absorption Tube Test: Horizontal RILEM II.4, 5.0 milliliters, 20 minutes
AA = Above Average **A** = Average

BA = Below Average

"Silver" Travertine	Results in mL loss	<u>Ranking</u>
Untreated Control	-0.0	--
Sure Klean® Weather Seal Natural Stone Treatment WB	-0.0	<u>AA</u>
Sure Klean® Weather Seal Color Enhancer WB	-0.0	<u>AA</u>

"Walnut" Travertine	Results in mL loss	<u>Ranking</u>
Untreated Control	-0.1	--
Sure Klean® Weather Seal Natural Stone Treatment WB	-0.0	<u>AA</u>
Sure Klean® Weather Seal Color Enhancer WB	-0.0	<u>AA</u>

"Shellstone" Limestone	Results in mL loss	<u>Ranking</u>
Untreated Control	-4.1	--
Sure Klean® Weather Seal Natural Stone Treatment WB	-0.0	<u>AA</u>
Sure Klean® Weather Seal Color Enhancer WB	-0.5	<u>AA</u>

"SW Black" Limestone	Results in mL loss	<u>Ranking</u>
Untreated Control	-0.0	--
Sure Klean® Weather Seal Natural Stone Treatment WB	-0.0	<u>AA</u>
Sure Klean® Weather Seal Color Enhancer WB	-0.0	<u>AA</u>

TEST RESULTS AND PHOTOGRAPHS: Protective Water Repellents (cont.)

Water Absorption Tube Test: Horizontal RILEM II.4, 5.0 milliliters, 20 minutes

AA = Above Average A = Average BA = Below Average

"SW Buff" Sandstone	Results in mL loss	<u>Ranking</u>
Untreated Control	-0.1	--
Sure Klean® Weather Seal Natural Stone Treatment WB	-0.0	<u>AA</u>
Sure Klean® Weather Seal Color Enhancer WB	-0.0	<u>AA</u>

"SW Grey" Sandstone	Results in mL loss	<u>Ranking</u>
Untreated Control	-0.0	--
Sure Klean® Weather Seal Natural Stone Treatment WB	-0.0	<u>AA</u>
Sure Klean® Weather Seal Color Enhancer WB	-0.0	<u>AA</u>

"SW Tan" Sandstone	Results in mL loss	<u>Ranking</u>
Untreated Control	-0.3	--
Sure Klean® Weather Seal Natural Stone Treatment WB	-0.0	<u>AA</u>
Sure Klean® Weather Seal Color Enhancer WB	-0.0	<u>AA</u>

CONCLUSIONS: Protective Water Repellents

Based on the laboratory evaluations, all of the treatments provided good water repellent protection to the submitted natural stone samples.

Although most of the untreated areas in the 20-minute RILEM test absorbed little to no water, the treatments will likely provide long-term water repellent protection and help to prevent water-related staining.

RECOMMENDATIONS: Protective Water Repellents

Recommendations for water repellency for each type of natural stone submitted by SiteOne Landscape Supply, Roswell, GA are provided in the chart below. Recommendations are based on the treatment(s) that proved most effective.

Sample	Water Repellency
"Diana Royal" Marble	Sure Klean® Weather Seal Natural Stone Treatment WB OR Sure Klean® Weather Seal Color Enhancer WB
"Ice White" Marble	
"Tundra Gray" Marble	
"Ivory" Travertine	
"Silver" Travertine	
"Walnut" Travertine	
"SW Black" Limestone	
"SW Buff" Sandstone	
"SW Grey" Sandstone	
"SW Tan" Sandstone	
"Shellstone" Limestone	¹Sure Klean® Weather Seal Natural Stone Treatment WB OR ²Sure Klean® Weather Seal Color Enhancer WB

NOTE: "1" indicates the recommended first choice and "2" indicates the recommended second choice.

Apply all products in accordance with the manufacturer's recommendation provided on container labels and product data sheets. On-site testing should be conducted to determine the most appropriate treatment and procedure for a particular project. See product literature for additional application and product information.



J. Lucas Comadoll
Chemist

ALL SAMPLES SUPPLIED FOR THE ABOVE EVALUATION WILL BE DISPOSED OF THIRTY (30) DAYS AFTER THE ISSUE DATE OF THIS REPORT. IF SAMPLES ARE TO BE RETAINED FOR ADDITIONAL TESTING OR RETURNED TO THE SENDER, PROVIDE WRITTEN INSTRUCTIONS TO THE LABORATORY WITHIN THIRTY (30) DAYS OF THE ISSUE DATE OF THIS REPORT.

Recommendations made within this report are based on laboratory test applications and observations. Final determination of the suitability of a product and/or procedure should be made only after thorough job testing on actual surfaces.